

CKC

LIGHT IT LIKE IT



Tourist M3



Adopts 400W CW LED light source
 Total luminous flux 15,000 lumens
 Beam Angle 3° ~53° zoom
 CCT 6500K
 CRI 90 (Measured with switched CIE color test samples)
 IP66 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

OPTAL

- Source: 400W CW LED
- Output: 15000 Lm
- Beam angle: 3 ~ 53°
- CCT: 6500K
- CRI: 72 (CRI 90 tested with standard color samples)
- Lens diameter: 140 mm
- Source lifetime: 20000 H

EFFECT

- Strobe: 1~20Hz
- LED refresh rate: 900Hz~25KHz
- Rotation gobo Wheel: 7 + 1
- Gobo size: Outer diameter 16.5mm/Inner diameter 12mm/Thickness 1.1mm
- Color wheel: 8 + 1
- CMY + CTO
- Prism: 6 fact prism + 6 linear
- Frost: Light frost + Heavy frost
- Animation + With iris
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each brade can realize complete beam closing. The whole cutting module can be rotated by $\pm 60^\circ$

CONTROL & PROGRAM

- Channel: 38/52 CH
- Protocal: DMX512, RDM, ArtNet/sACN
- Data connector: 3PIN XLR, RJ45 In/Out
- Display: 2.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on
- NFC: The fixture does not require power on, and the mobile app can change panel parameter settings such as address code and channel mode through NFC chip

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 700 W

OTHER

- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 395 × 255 × 634 mm
- N.W: 29.4 kgs

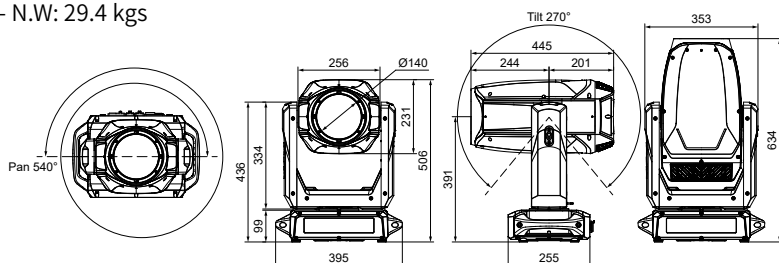


PHOTOMETRICAL DATA

Distance(m)	0	8	15	30	50
3~53° CRI: 72					
Lux 3°		43000	19300	3058	1101
Diameter(m)		0.42	0.79	1.57	2.62
Lux 53°		598	282	43	
Diameter(m)		7.98	14.96	29.91	

ROTATION GOBO



COLOUR

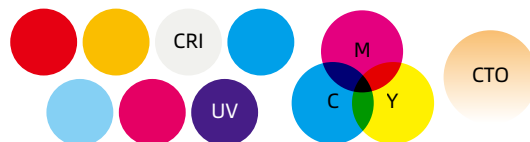

FRAMING BLADES



ANIMATION



PRISM



FROST

