





LIGHT IT LIKE IT

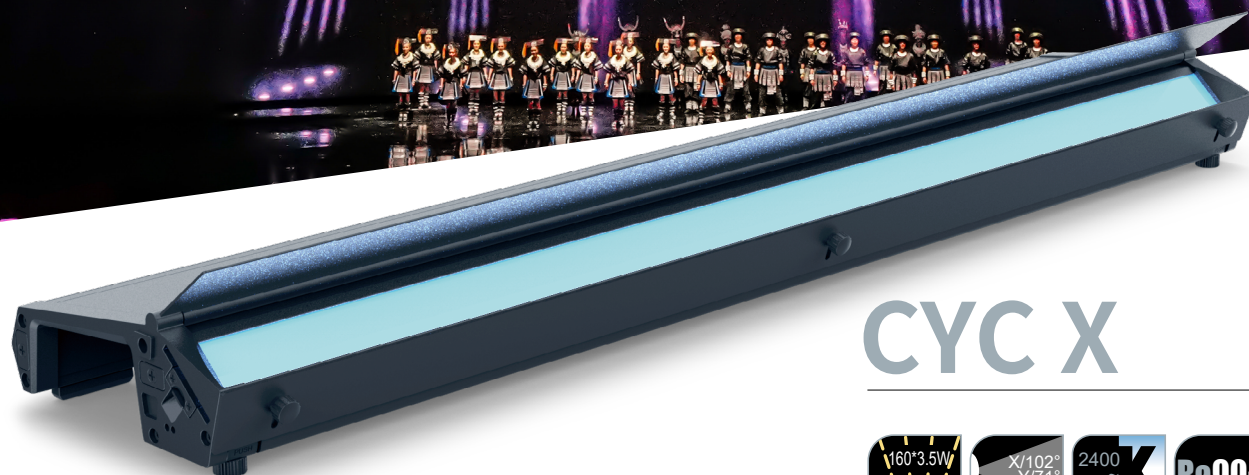

CYC X

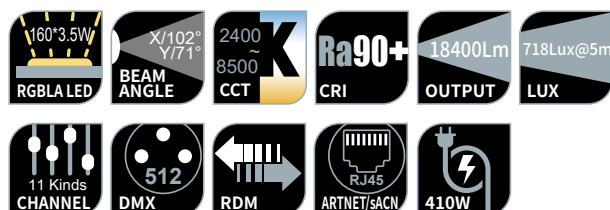

Adopts 160 × 3.5W RGBLA LED
 Output: 18400Lm
 Horizontal beam angle: 66° (50%)
 Vertical beam angle: 39° (50%)
 Horizontal field angle: 102° (10%)
 Vertical field angle: 71° (10%)
 CCT: 2400 ~ 8500K
 CRI: 90+

OPTIC

- Source: 160 × 3.5W RGBLA LED
- Output: 18400Lm
- Lux: 718 Lux@5m
- Horizontal beam angle: 66° (50%)
- Vertical beam angle: 39° (50%)
- Horizontal field angle: 102° (10%)
- Vertical field angle: 71° (10%)
- CCT: 2400 ~ 8500K
- CRI: 90+
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25Hz
- LED refresh rate: 900Hz~25KHz
- Dimmer Mode: 6 kinds
- Dimmer Curve: 4 kinds

CONTROL & PROGRAM

- Channel: 1 / 4-1 / 4-2 / 11 / 16 / 13 / 20 / 19 / 32 / 31 / 56 CH
- Protocol: DMX512, RDM, ArtNet/sACN
- Data connector: 3 PINXLR, RJ45 Network Port
- Display: OLED display

SOFTWARE

- Via DMX signal to update
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure
- Natural heat dissipation

POWER CONSUMPTION

- Voltage: AC 100V~240V 50/60Hz
- Rated power: 410 W

OTHER

- IP rating: IP30
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 957 × 206 × 85 mm
- N.W: 7.9 kgs



PHOTOMETRICAL DATA

