




LIGHT IT LIKE IT



Mini Blinder



Adopts 84 × 3.5W RGBWAL LED
Output: 12700 Lm
Beam angle: 46° (Optional: 34°)
Field angle: 86° (Optional: 56°)
CCT: 1800K ~ 8500K
CRI: 92+
IP rating: IP65
Resistant to salt corrosion
Facilitates various splicing shapes

OPTIC

- Source: 84 × 3.5W RGBWAL LED
- Output: 12700 Lm
- Beam angle: 46° (Optional: 34°)
- Field angle: 86° (Optional: 56°)
- CCT: 1800K ~ 8500K
- CRI: 92+
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25HZ
- LED refresh rate: 900Hz~25KHz

CONTROL & PROGRAM

- Channel: 1/2/3/4/6/7/14/21/10-1/15-1/10-2/15-2 CH
- Protocol: DMX512, RDM
- Data connector: 3 PIN XLR
- Display: OLED display

SOFTWARE

- Via DMX signal to update
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure
- Natural heat dissipation
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 270 W

OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 264 × 170 × 301 mm
- N.W: 4.3 kgs

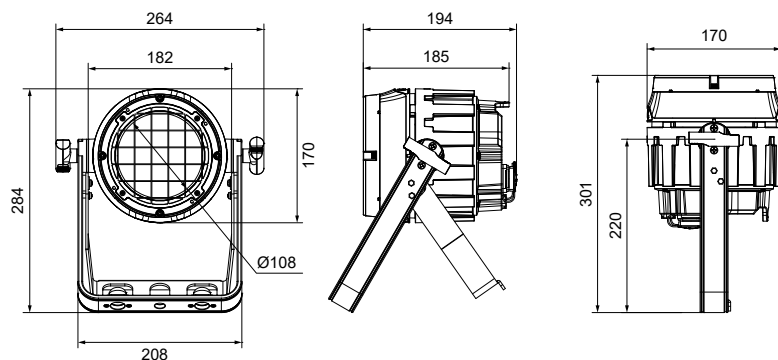


PHOTOMETRIC DATA

Distance(m)	0	3	5	8
Lux 56°		2570	1080	489
Diameter(m)		3.19	5.32	8.51
Lux 86°		1510	661	289
Diameter(m)		5.60	9.33	14.92

VARIOUS COMBINATIONS

- ① Barndoor ② Floor Stand ③ Rear Mount Bracket
④ Interconnect Pack ⑤ Connector ⑥ Smoked Clear Lens
⑦ Frosted Lens ⑧ Dome Lens ⑨ BOWENS Adapter
⑩ Integrated cable

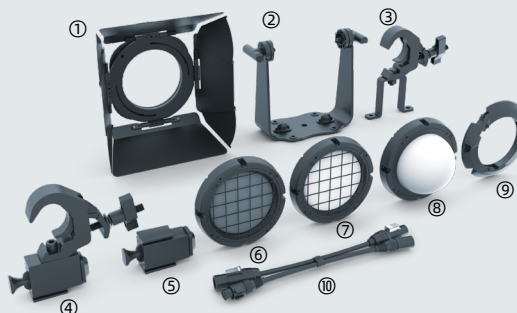

Rich in accessories, capable of splicing various combinations

