


CKC

CYC X

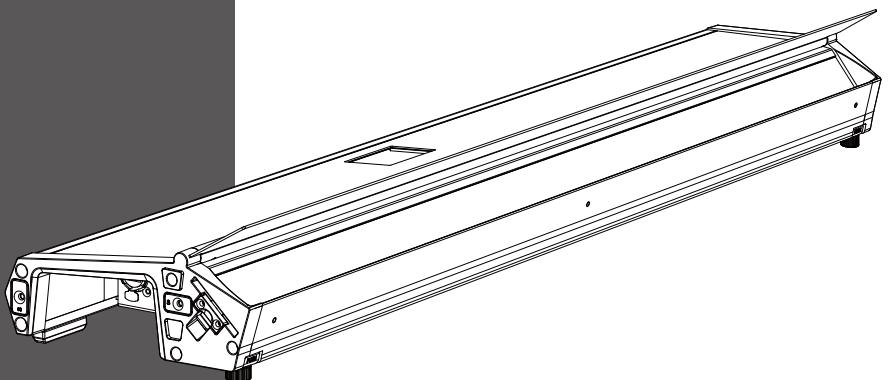

CKC LIGHTING CO.,LTD

Addr.:335 Nansha Avenue, Tung Chung Town,
Nansha District, Guangzhou City, China.
TEL: (020)3920 4506 FAX: (020)3920 4631
WEB: www.ckclighting.com

www.ckclighting.com



Before carrying out any installation, maintenance, or cleaning of the lighting fixtures, please confirm that the power has been cut off! Before using this fixture, please read this manual. Our company reserves the right to change product design and specifications without prior notice.

CONTENTS

1. Security Warning Information	1
2. Product Introduction	3
2.1 Exterior dimensions	3
2.2 Fixture packaging accessories	3
3. Main technical parameters of the equipment	3
4. Packaging and transportation	4
4.1 Disassemble packaging	4
4.2 Equipment installation	4
5. Installation Requirements Explanation	4
5.1 Clamp installation	4
5.2 Fixture installtion	5
5.3 Hanging Installation Diagram	5
6. Power and signal connection	6
6.1 Power and signal socket	6
6.2 Power Connect	6
6.3 Signal Connect	7
7. Control panel	7
7.1 Panel Introduction	7
7.2 System menu	8
8. DMX control channel table	10
9. Control circuit diagram	24
10. Regular maintenance	24
10.1 Cleaning and maintenance	24
10.2 Fault analysis and handling	25

★ Statement ★

- This manual contains important information on safe use and installation. Please read it carefully and follow the requirements for operation and installation. Please keep this manual properly;
- The equipment has good performance and complete packaging when it leaves the factory. The operator should strictly follow the warning items and operating instructions stated in the manual. Any malfunction or damage caused by misuse or neglect of the manual is not within the scope of our company's responsibility and warranty;
- The relevant information in this manual is for reference only. All lighting products are subject to the actual product. Any changes will not be notified separately, and our company reserves the right of final interpretation.

1. Security Warning Information



Attention !

Please read the safety requirements information in this section carefully before installing, powering on, operating, or repairing the lighting fixtures.



- This product is for professional use and is not suitable for other purposes;
- After receiving the lighting fixtures, please check if the packaging is complete and unpack to check if the equipment has been damaged due to transportation. If there is any damage caused by transportation, please do not use this lamp and contact local technicians or manufacturers as soon as possible;
- When transporting again, please use the original packaging materials;
- If there is obvious damage to the machine casing, it should be replaced in a timely manner;
- When hanging lamps, it is necessary to verify that the hanging equipment can withstand more than 6 times the weight of the lamp. After installation, it is necessary to verify that the lamp cover and installation buckle are secure and undamaged. At the same time, a safety rope should be used as an auxiliary safety for the lamp and fixed on the truss;
- The light source inside this luminaire should be replaced by the manufacturer, its service agent, or a similarly qualified person;
- If you have any other questions about how to safely operate the equipment, please contact our technical personnel or call our service hotline;
- This product has a protection level of IP20 and can be used both indoors;
- Avoid direct external strong light shining on the lens, which may cause the lens to focus and burn out internal components.



- Lighting fixtures should be kept clean and avoid prolonged use in overheated or dusty environments to prevent contact with chemical liquids;
- When using the product, attention should be paid to avoiding serious or fatal injuries caused by fire, heat, electrical shock, and ultraviolet radiation. Before powering on or installing, read the instruction manual first. Follow the safety precautions for operation and pay attention to the warning signs on the instructions and equipment;
- Only professionals are allowed to install, operate, and maintain lighting fixtures, and strictly follow the procedures stated in the operating instructions.



- The eyes cannot directly look at the luminous object;
- Do not connect this device to any dimmer;
- If visible damage occurs to the protective casing, lens, and display screen on the lighting fixture, it is considered as damage to the point of loss;
- Please do not place any filters or other items at the light outlet, and do not replace non original parts;
- The minimum safe illumination distance of the lamp is 1m.



- Before installation, please confirm that the power supply voltage used matches the voltage indicated on the light fixture. Each lighting fixture should be properly grounded and electrically installed according to relevant standards;
- Please disconnect the power before repairing or cleaning the equipment;
- During the operation of the lighting fixtures, touching the wires is prohibited to prevent electric shock;
- If the external soft cable or wire of this lamp is damaged, the wire should be replaced by the manufacturer, its agent, or a similarly qualified person to avoid danger;
- Avoid flammable liquids, water, or metal conductors from entering the interior of the lamp to prevent electric shock or fire. If any foreign objects enter the lamp, immediately cut off the power supply;
- When multiple lamps are operated in series, the signal lines can be connected in multiple ways, but the power supply must be connected separately.




- The lighting fixtures work normally at -20 °C to 45 °C . When replacing any components or accessories in the equipment, ensure that the power is disconnected to prevent electric shock and injury;
- The maximum surface temperature of the lamp during operation can reach 77 °C , please do not touch it with bare hands.



- The lighting fixtures must be installed in a sufficiently ventilated area, at least 0.5m away from adjacent surfaces, to ensure that no ventilation holes are blocked;
- Do not install the lighting fixtures directly on flammable objects;
- The minimum distance between all outer surfaces of the lamp and combustible materials is 0.5m.


2. Product Introduction

2.1 Exterior dimensions of lighting fixtures

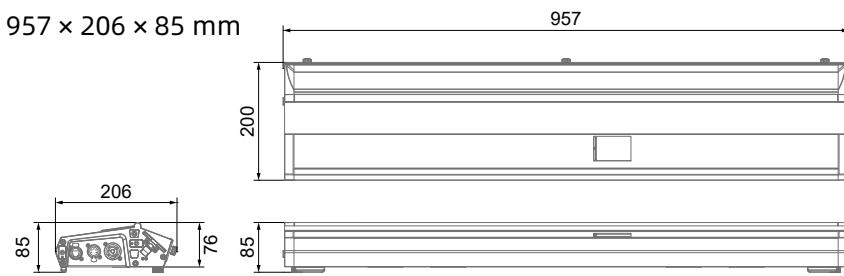

2.2 Packaging accessories

Name	QTY
Omega bracket	2 PCS
Clamp	2 PCS
Safety cable	2 PCS

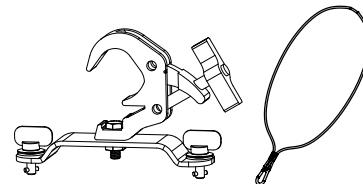

3. Main technical parameters of the equipment

Product execution standards: GB7000.1-2023, GB7000.217-2023, Q/YF-2017

● Electrical parameter

Rated input voltage: AC 100V-240V~ 50Hz/60Hz

Rated power: 410 W

Power factor: 0.997F

Input Current: 1.805A 220V

● Source lifespan

> 20000 hours

● Optical system

Source: 160 x 3.5W RGBAL LED

Output luminous flux: 18400 Lm

Beam angel: X/66° (50%) Y/39° (50%)

Field angle: X/102° (10%) Y/71° (10%)

CCT: 2400K-8500K

CRI: 90+


● Control and programming

Control channel: 1CH/4CH/4CH/11CH/16CH/13CH/20CH/19CH/32CH/56CH

Protocol: DMX512, RDM, ArtNet/sACN

Data connect: 3 pin or 5pin signal in/out, RJ45 in/out

● Illumination draw

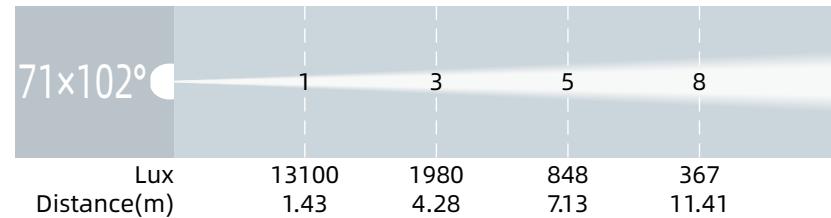

● Other effect function

Fast electronic strobe: 1~25Hz

Dimming Mode: 6

LED refresh rate: 900Hz~25KHz

Dimming Curve: 4

● Other features and functions

Weight: 7.9 KG

4. Packaging and transportation

4.1 Disassemble packaging

 Notice: After receiving the fixture, please unpack and check for any damage caused by transportation. If there is any damage caused by transportation, please do not use this fixture and contact the local technical personnel or manufacturer as soon as possible.


4.2 Equipment packaging

- 1). Disconnect the power supply before packaging the lighting fixtures to allow them to cool completely;
- 2). Flight cases can only be stacked in two layers and are not allowed to be reversed.

5. Installation Requirements Explanation

5.1 Clamp install

The lighting fixtures can be installed on the stage or on any direction of the truss, and the clamp can be quickly and easily locked onto the truss.

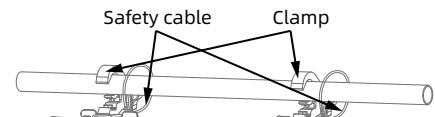


Warning !

The lighting fixtures are divided into two versions: integrated light hook and normal. When using the integrated light hook version, the clamp is broken up and locked onto the truss. The normal version must use 2 clamps to secure the device and fasten it with a 1/4 rotation. Regardless of the version, 2 safety rope must be added and connected to the base hole, but be careful not to connect it to the handling handle.




Quick lock and clamp install

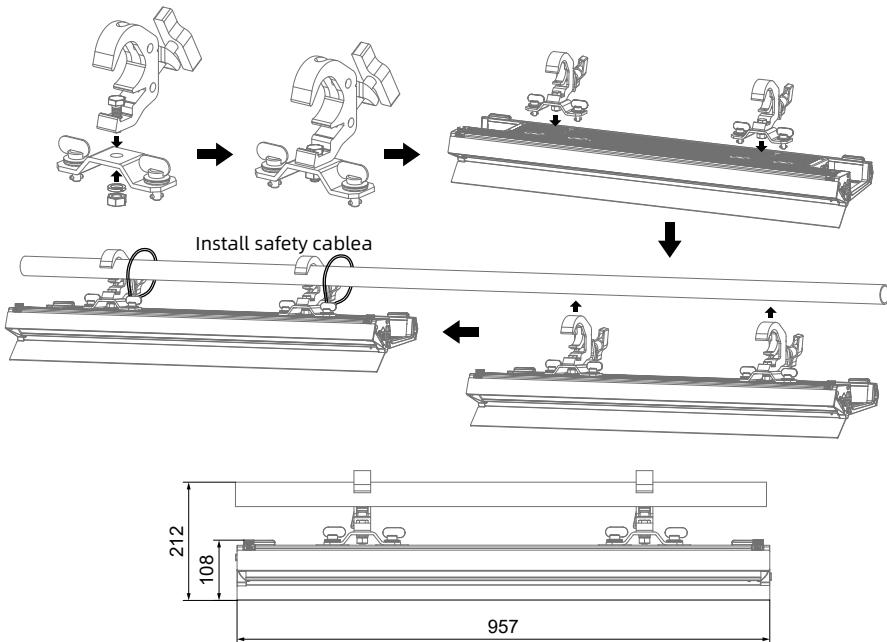

5.2 Equipment installation

- 1). Before installation, it is necessary to verify that the lamp hook and safety rope are not damaged, and that the installation object can withstand 6 times the total weight of the lamp and cable accessories;
- 2). Install the quick lock clamp on the base of the lamp body. Insert the clamp horizontally into the mounting hole of the base, rotate it clockwise 1/4 turn to lock it, and install the second clamp using the same method (the shape of the clamp should be based on the actual product).


5.3 Hanging Installation Diagram

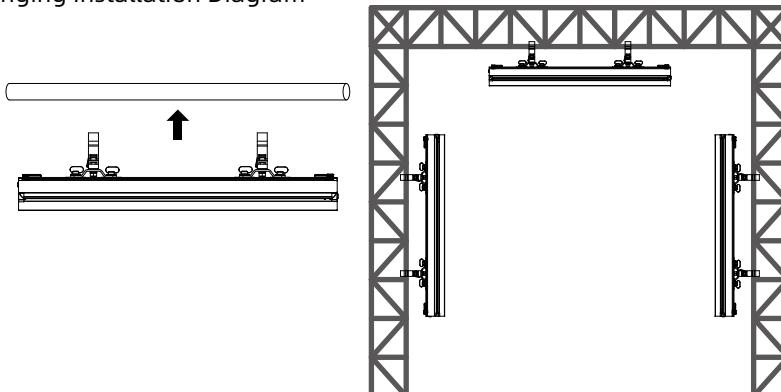


6. Power、Signal connect

6.1 Power and signal socket

1. Power input
2. DMX input
3. RJ45 input
4. DMX output
5. RJ45 output
6. Power output

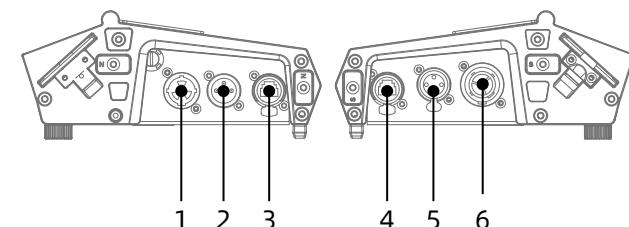

6.2 Power connect

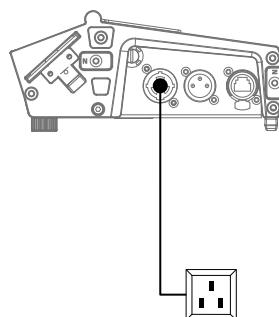

Power In

Connection method:

L(live wire) - brown wire

E(Ground wire) - yellow/green dual color line

N(Zero Line) - Blue Line

When connecting the power supply, please note that the voltage and frequency of the power supply must match the voltage and frequency marked on the light fixture. When multiple fixtures are used simultaneously, it is recommended to connect the power supply of each fixture separately, so that each fixture can be individually controlled for power on/off.

Attention: When connecting the power supply, the ground wire (yellow/green dual color wire) must be safely grounded and comply with all relevant electrical installation standards.


This product uses Powercon In/Out to connect power cords. Due to power limitations, a 2 square meter power cord can carry up to 5 products at 220V and 2 product at 110V.



Waining !


- Do not connect too many fixtures or overload a single power cord;
- Do not use power cords with damaged insulation layers, and do not place power cords on other wires;
- When the fixture is not in use or cleaned, please unplug the power cord; Do not forcefully unplug or drag the power cord directly.

6.3 Signal connect

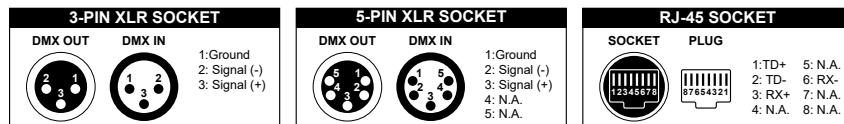


The lighting fixtures are equipped with standard DMX XLR and RJ-45 input and output sockets. Please use DMX512 shielded twisted pair signal cables or Category 3/5 or above network twisted pair cables for connection.

The typical connection distance for DMX signal lines is 150 meters. When transmitting signals over long distances, a DMX512 signal amplifier must be added.

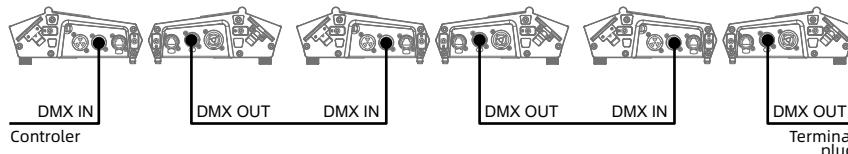


Connect a shielded twisted pair signal cable from the DMX output port of the controller to the DMX input port of the first device, and from the DMX output port of the first device to the DMX input port of the second device, and so on, until all the lamps are connected. Then install a terminal plug on the last 3 or 5 pin socket of each connected lamp output. (Weld a 4/1W, 120 Ω resistor between the 2 and 3 pins of a 3 or 5 core pin XLR plug).

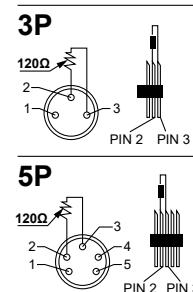

7. Control panel

7.1 Panel Introduction

- Adopting a OLED display screen;
- Press the MODE key to view or modify the lighting function settings, and press the UP, DOWN, LEFT, and RIGHT keys to select the function menu;
- Press the ENTER key to confirm your selected function menu, which will take you to the corresponding sub menu in the menu. Each menu item represents a specific function of the lighting fixture (as shown in the table below);
- Press the ENTER key to save your modifications or enter a submenu, and press the UP or DOWN key to modify values (increase or decrease values); Press the MODE key to return to the previous menu or exit.
- Press the MODE key to return to the previous menu or exit.

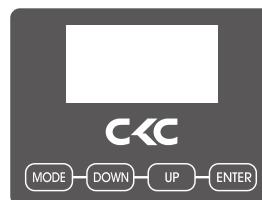

7.2、System menu

Note: The gray color block is the default setting value

CH:xxx.xxCH ADDR:xxx		
MAIN INTERFACE	DMX Address	001 - 512
	Dimmer 1CH	
	RGB 4CH	
	CCT 4CH	
	CMY 11CH	
	CMY Extended 16CH	
	Standard 13CH	
	Extended 20CH	
	Standard 2 Zone 19CH	
	Extended 2 Zone 32CH	
	Standard 4 Zone 31CH	
	Extended 4 Zone 56CH	
DMX SETTINGS	DMX Mode	
	Hold Last	
	Fade to black	
	EdgeLite	
	Standalone	
	Dimmer	000% - 100%
STANDALONE	CCT	2400K - 8500K (Default = 6000K)
	Green Shift	-100% ~ +100% (Default = 0)
	Virtual Color	See Color Macros
	Primary	On / Off
	Secondary	On / Off
Fixture ID	Service PIN (Password = 050)	
	Universe	
	Unit IP Address	
	Mask Address	
PERSONALITY	Protocol Set	Artnet/sACN
	KlingNet	On / Off
	Net Switch	On / Off
	Dim Modes	OFF Dimmer 1 Dimmer 2 Dimmer 3 Standard Stage TV

PERSONALITY	Architectural		
	Theatre		
	Stage 2		
	Dim Speed 0s - 10s (Default = 0.1s)		
	Red Shift (ON/OFF)		
	Dim Curves	Linear	
		Square	
		Square Inverse	
		S-Curve	
	LED Refresh Rate	900Hz - 1500Hz, 2500Hz, 4000Hz, 5000Hz, 6000Hz, 10kHz, 15kHz, 20kHz, 25kHz (Default = 1200 Hz)	
	LED Power Limit	50%	
		60%	
		70%	
		80%	
		90%	
		100%	
	Display	Screen Delay Off, 10s-5min (Default = 1min)	
		Screen Lock Off, 10s-5min	
		Rotate Display Yes / No / Auto	
	Service (Passcode = 050)	Calibration	Red 000 - 255
			Green 000 - 255
			Blue 000 - 255
			Mint 000 - 255
			Amber 000 - 255
		Factory Restore Yes / No	
INFORMATION	Life Time	xxxxx h	
	Last Run Time	xxxxx h	
	Time Reset	Passcode = 038	
	Temperature	Current	
		Max Resettable	
		Reset (Passcode = 038)	
	DMX Values	Red	
		Green	
		...	
	Product IDs	RDM UID	
	Error Logs	Fixture Errors	
		Reset Error Log (Yes / No Passcode = 050)	
	Software Version	1U : V1.06	
		2U : V1.06	
		3U : V1.06	

8. DMX channel table:

Dimmer 1CH	RGB 4CH	CCT 4CH	CMY 11CH	CMY Extended 16CH	Standard 13CH	Value Range	Function
1	1	1	1	1	1	0-255	Dimmer
			2	2	2	0-255	Dimmer Fine
							Fine Adjustment
							Shutter/Strobe
					3	3	0-31 Shutter closed
							32-63 No function (shutter open)
							64-95 Strobe effect slow to fast
							96-127 No function (shutter open)
							128-159 Pulse-effect in sequences
							160-191 No function (shutter open)
							192-223 Random strobe effect slow to fast
							224-255 No function (shutter open)
			2		4	0-255	Red
							0 → 100%
					0-255		Red Fine
							Fine Adjustment
			3		5	0-255	Green
							0 → 100%
					0-255		Green Fine
							Fine Adjustment
			4		6	0-255	Blue
							0 → 100%
					0-255		Blue Fine
							Fine Adjustment
					7	0-255	Mint
							0 → 100%
					0-255		Mint Fine
							Fine Adjustment
					8	0-255	Amber
							0 → 100%
					0-255		Amber Fine
							Fine Adjustment
					0-255		Red 2
							0 → 100%
					0-255		Red Fine 2
							Fine Adjustment
					0-255		Green 2
							0 → 100%
					0-255		Green Fine 2
							Fine Adjustment

					0-255	Blue 2
					0-255	0 → 100%
					0-255	Blue Fine 2
					0-255	Fine Adjustment
					0-255	Mint 2
					0-255	0 → 100%
					0-255	Mint Fine 2
					0-255	Fine Adjustment
					0-255	Amber 2
					0-255	0 → 100%
					0-255	Amber Fine 2
					0-255	Fine Adjustment
					0-255	Red 3
					0-255	0 → 100%
					0-255	Red Fine 3
					0-255	Fine Adjustment
					0-255	Green 3
					0-255	0 → 100%
					0-255	Green Fine 3
					0-255	Fine Adjustment
					0-255	Blue 3
					0-255	0 → 100%
					0-255	Blue Fine 3
					0-255	Fine Adjustment
					0-255	Mint 3
					0-255	0 → 100%
					0-255	Mint Fine 3
					0-255	Fine Adjustment
					0-255	Amber 3
					0-255	0 → 100%
					0-255	Amber Fine 3
					0-255	Fine Adjustment
					0-255	Red 4
					0-255	0 → 100%
					0-255	Red Fine 4
					0-255	Fine Adjustment
					0-255	Green 4
					0-255	0 → 100%
					0-255	Green Fine 4
					0-255	Fine Adjustment
					0-255	Blue 4
					0-255	0 → 100%
					0-255	Blue Fine 4
					0-255	Fine Adjustment

					0-255	Mint 4
					0-255	0 → 100%
					0-255	Mint Fine 4
					0-255	Fine Adjustment
					0-255	Amber 4
					0-255	0 → 100%
					0-255	Amber Fine 4
					0-255	Fine Adjustment
				4	0-255	Cyan
				4	0-255	0 → 100%
				5	0-255	Cyan Fine
				5	0-255	Fine Adjustment
				6	0-255	Magenta
				6	0-255	0 → 100%
				7	0-255	Magenta Fine
				7	0-255	Fine Adjustment
				8	0-255	Yellow
				8	0-255	0 → 100%
				9	0-255	Yellow Fine
				9	0-255	Fine Adjustment
				0-255	Hue	
				0-255	0 → 360°	
				0-255	Saturation	
				0-255	0 → 100%	
				3	0-26	Variable CCT
				7	0-26	Open
				10	27-85	2700K → 8500K (See Sheet)
				9	86-255	8500K
					0-26	Variable CCT 2
					0-26	Open
					27-85	2700K → 8500K (See Sheet)
					86-255	8500K
					0-26	Variable CCT 3
					0-26	Open
					27-85	2700K → 8500K (See Sheet)
					86-255	8500K
					0-26	Variable CCT 4
					0-26	Open
					27-85	2700K → 8500K (See Sheet)
					86-255	8500K
					0-26	CCT Cross Fade
					0	CCT
					255	Color Mix
					0	Color
					0	Open

							1-179	Virtual Swatch Book (See Table)
Color Scroll								
							180-201	Clockwise Fast → Slow
							202-207	Stop
							208-229	Counter-clockwise Slow → Fast
							230-234	Open
Random Slots								
							235-239	Fast
							240-244	Medium
							245-249	Slow
							250-255	Open
							Green Shift	
							0	Idle
							1-127	Full Minus Green to Neutral
							128	Neutral White
							129-255	Neutral to Full Plus Green
							Green Shift 2	
							0	Idle
							1-127	Full Minus Green to Neutral
							128	Neutral White
							129-255	Neutral to Full Plus Green
							Green Shift 3	
							0	Idle
							1-127	Full Minus Green to Neutral
							128	Neutral White
							129-255	Neutral to Full Plus Green
							Green Shift 4	
							0	Idle
							1-127	Full Minus Green to Neutral
							128	Neutral White
							129-255	Neutral to Full Plus Green
							EdgeLight Level	
							0-10	Off
							11-20	Default
							21-255	Intensity Min → Max
							Dim Modes	
							0-20	Standard
							21-40	Stage
							41-60	TV
							61-80	Architectural
							81-100	Theatre
							101-120	Stage 2
							Dimmer Delay Time	
							121	0s

							122	0.1s
							123	0.2s
							124	0.3s
							125	0.4s
							126	0.5s
							127	0.6s
							128	0.7s
							129	0.8s
							130	0.9s
							131	1.0s
							132	1.5s
							133	2.0s
							134	3.0s
							135	4.0s
							136	5.0s
							137	6.0s
							138	7.0s
							139	8.0s
							140	9.0s
							141	10s
							142-255	Idle
							Control	
							0-69	Idle
							EdgeLite Control	
							70-74	Disabled
							75-79	Always ON
							80-84	DMX
							85-94	Red
							95-99	Blue
							Refresh Rate (Hz)	
							100	900
							101	910
							102	920
							103	930
							104	940
							105	950
							106	960
							107	970
							108	980
							109	990
							110	1000
							111	1010
							112	1020
							113	1030

114	1040
115	1050
116	1060
117	1070
118	1080
119	1090
120	1100
121	1110
122	1120
123	1130
124	1140
125	1150
126	1160
127	1170
128	1180
129	1190
130	1200
131	1210
132	1220
133	1230
134	1240
135	1250
136	1260
137	1270
138	1280
139	1290
140	1300
141	1310
142	1320
143	1330
144	1340
145	1350
146	1360
147	1370
148	1380
149	1390
150	1400
151	1410
152	1420
153	1430
154	1440
155	1450
156	1460
157	1470
158	1480

159	1490
160	1500
161	2500
162	4000
163	5000
164	6000
165	10000
166	15000
167	20000
168	25000
169-200	Idle
Dimmer Curves	
201-210	Dimmer Curve: Linear (Default)
211-220	Dimmer Curve: Square
221-230	Dimmer Curve: Inverse Square
231-240	Dimmer Curve: S-Curve
241-255	Idle

Extended 20CH	Standard 2 Zone 19CH	Extended 2 Zone 32CH	Standard 4 Zone 31CH	Extended 4 Zone 56CH	Value Range	Function
1	1	1	1	1	0-255	Dimmer Intensity 0 → 100%
2	2	2	2	2	0-255	Dimmer Fine Fine Adjustment
3	3	3	3	3	0-31	Shutter closed
					32-63	No function (shutter open)
					64-95	Strobe effect slow to fast
					96-127	No function (shutter open)
					128-159	Pulse-effect in sequences
					160-191	No function (shutter open)
4	4	4	4	4	192-223	Random strobe effect slow to fast
					224-255	No function (shutter open)
5		5		5	0-255	Red 0 → 100%
					0-255	Red Fine Fine Adjustment
6	5	6	5	6	0-255	Green 0 → 100%
					0-255	Green Fine Fine Adjustment
7		7		7	0-255	Blue 0 → 100%
					0-255	

9		9		9	0-255	Blue Fine
						Fine Adjustment
10	7	10	7	10	0-255	Mint
						0 → 100%
11		11		11	0-255	Mint Fine
						Fine Adjustment
12	8	12	8	12	0-255	Amber
						0 → 100%
13		13		13	0-255	Amber Fine
						Fine Adjustment
	9	14	9	14	0-255	Red 2
						0 → 100%
		15		15	0-255	Red Fine 2
						Fine Adjustment
	10	16	10	16	0-255	Green 2
						0 → 100%
		17		17	0-255	Green Fine 2
						Fine Adjustment
11	18	11	18	0-255	Blue 2	
						0 → 100%
		19		19	0-255	Blue Fine 2
						Fine Adjustment
12	20	12	20	0-255	Mint 2	
						0 → 100%
		21		0-255	Mint Fine 2	
						Fine Adjustment
13	22	13	22	0-255	Amber 2	
						0 → 100%
		23		0-255	Amber Fine 2	
						Fine Adjustment
			14	24	0-255	Red 3
						0 → 100%
				25	0-255	Red Fine 3
						Fine Adjustment
				15	26	Green 3
						0 → 100%
					27	Green Fine 3
						Fine Adjustment
				16	28	Blue 3
						0 → 100%
					29	Blue Fine 3
						Fine Adjustment
						Mint 3
						0 → 100%
			17	30	0-255	

				31	0-255	Mint Fine 3
						Fine Adjustment
				18	32	Amber 3
						0 → 100%
				33	0-255	Amber Fine 3
						Fine Adjustment
				19	34	Red 4
						0 → 100%
				35	0-255	Red Fine 4
						Fine Adjustment
				20	36	Green 4
						0 → 100%
				37	0-255	Green Fine 4
						Fine Adjustment
				21	38	Blue 4
						0 → 100%
				39	0-255	Blue Fine 4
						Fine Adjustment
				22	40	Mint 4
						0 → 100%
				41	0-255	Mint Fine 4
						Fine Adjustment
				23	42	Amber 4
						0 → 100%
				43	0-255	Amber Fine 4
						Fine Adjustment
					0-255	Cyan
						0 → 100%
					0-255	Cyan Fine
						Fine Adjustment
					0-255	Magenta
						0 → 100%
					0-255	Magenta Fine
						Fine Adjustment
					0-255	Yellow
						0 → 100%
					0-255	Yellow Fine
						Fine Adjustment
					0-255	Hue
						0 → 360°
					0-255	Saturation
						0 → 100%

						Variable CCT	
14		24		44		0-26 Open	
14		24		44		27-85 2700K → 8500K (See Sheet)	
14		24		44		86-255 8500K	
				Variable CCT 2			
15		25		45		0-26 Open	
15		25		45		27-85 2700K → 8500K (See Sheet)	
15		25		45		86-255 8500K	
				Variable CCT 3			
15		26		46		0-26 Open	
15		26		46		27-85 2700K → 8500K (See Sheet)	
15		26		46		86-255 8500K	
				Variable CCT 4			
15		27		47		0-26 Open	
15		27		47		27-85 2700K → 8500K (See Sheet)	
15		27		47		86-255 8500K	
				CCT Cross Fade			
15		26		48		0 CCT	
15		26		48		255 Color Mix	
				Color			
16		27		49		0 Open	
16		27		49		1-179 Virtual Swatch Book (See Table)	
16		27		49		Color Scroll	
16		27		49		180-201 Clockwise Fast → Slow	
16		27		49		202-207 Stop	
16		27		49		208-229 Counter-clockwise Slow → Fast	
16		27		49		230-234 Open	
				Random Slots			
16		27		49		235-239 Fast	
16		27		49		240-244 Medium	
16		27		49		245-249 Slow	
16		27		49		250-255 Open	
				Green Shift			
17		28		50		0 Idle	
17		28		50		1-127 Full Minus Green to Neutral	
17		28		50		128 Neutral White	
17		28		50		129-255 Neutral to Full Plus Green	
				Green Shift 2			
17		29		51		0 Idle	
17		29		51		1-127 Full Minus Green to Neutral	
17		29		51		128 Neutral White	
17		29		51		129-255 Neutral to Full Plus Green	
				Green Shift 3			
17		29		51		0 Idle	
17		29		51		1-127 Full Minus Green to Neutral	

						128	Neutral White
						129-255	Neutral to Full Plus Green
							Green Shift 4
						0	Idle
						1-127	Full Minus Green to Neutral
						128	Neutral White
						129-255	Neutral to Full Plus Green
							EdgeLight Level
						0-10	Off
						11-20	Default
						21-255	Intensity Min → Max
							Dim Modes
						0-20	Standard
						21-40	Stage
						41-60	TV
						61-80	Architectural
						81-100	Theatre
						101-120	Stage 2
							Dimmer Delay Time
						121	0s
						122	0.1s
						123	0.2s
						124	0.3s
						125	0.4s
						126	0.5s
						127	0.6s
						128	0.7s
						129	0.8s
						130	0.9s
						131	1.0s
						132	1.5s
						133	2.0s
						134	3.0s
						135	4.0s
						136	5.0s
						137	6.0s
						138	7.0s
						139	8.0s
						140	9.0s
						141	10s
						142-255	Idle
							Control
						0-69	Idle
							EdgeLite Control
						70-74	Disabled

75-79	Always ON
80-84	DMX
85-94	Red
95-99	Blue
Refresh Rate (Hz)	
100	900
101	910
102	920
103	930
104	940
105	950
106	960
107	970
108	980
109	990
110	1000
111	1010
112	1020
113	1030
114	1040
115	1050
116	1060
117	1070
118	1080
119	1090
120	1100
121	1110
122	1120
123	1130
124	1140
125	1150
126	1160
127	1170
128	1180
129	1190
130	1200
131	1210
132	1220
133	1230
134	1240
135	1250
136	1260
137	1270
138	1280
139	1290

20 19 32 31 56

140	1300
141	1310
142	1320
143	1330
144	1340
145	1350
146	1360
147	1370
148	1380
149	1390
150	1400
151	1410
152	1420
153	1430
154	1440
155	1450
156	1460
157	1470
158	1480
159	1490
160	1500
161	2500
162	4000
163	5000
164	6000
165	10000
166	15000
167	20000
168	25000
169-200	Idle
Dimmer Curves	
201-210	Dimmer Curve: Linear (Default)
211-220	Dimmer Curve: Square
221-230	Dimmer Curve: Inverse Square
231-240	Dimmer Curve: S-Curve
241-255	Idle

CCT

Value	CCT	Value	CCT	Value	CCT	Value	CCT
24	2400	40	4000	56	5600	72	7200
25	2500	41	4100	57	5700	73	7300
26	2600	42	4200	58	5800	74	7400
27	2700	43	4300	59	5900	75	7500

28	2800
29	2900
30	3000
31	3100
32	3200
33	3300
34	3400
35	3500
36	3600
37	3700
38	3800
39	3900
44	4400
45	4500
46	4600
47	4700
48	4800
49	4900
50	5000
51	5100
52	5200
53	5300
54	5400
55	5500
60	6000
61	6100
62	6200
63	6300
64	6400
65	6500
66	6600
67	6700
68	6800
69	6900
70	7000
71	7100
76	7600
77	7700
78	7800
79	7900
80	8000
81	8100
82	8200
83	8300
84	8400
85	8500


27	793	vanity fair
28	113	magenta
29	46	dark magenta
30	48	rose purple
31	126	mauve
58	206	Quarter CT Orange
59	205	Half CT Orange
60	204	FULL CT Orange
61-179		No function

Block distribution map



↑ Audience reach

9. Control circuit diagram

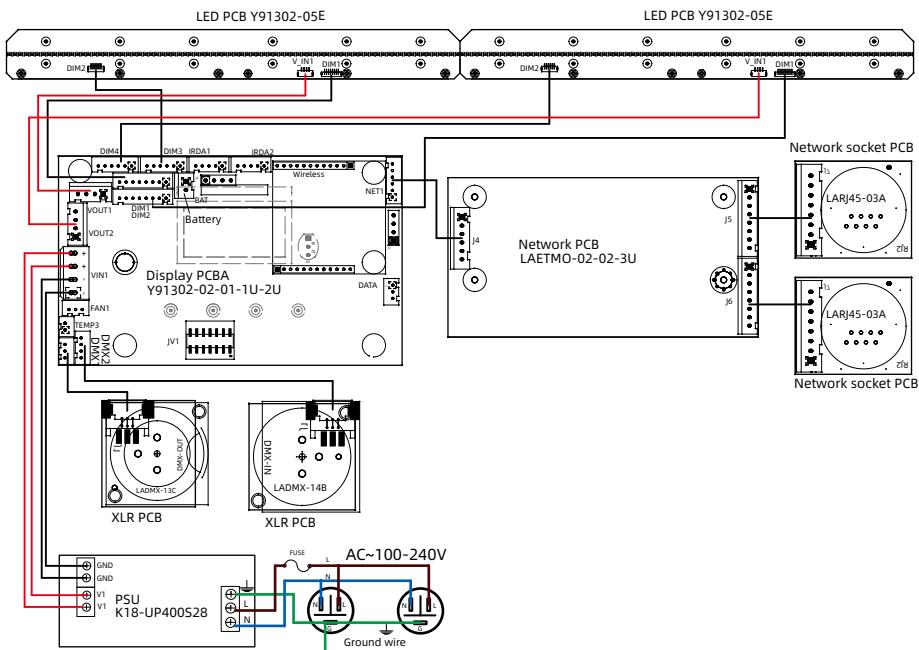

Virtual Colors

Value	Filter Number	Name	Value	Filter Number	Name
1	7	pale yellow	32	49	medium purple
2	103	straw	33	58	lavender
3	151	gold tint	34	199	palace blue
4	100	spring yellow	35	119	dark blue
5	10	medium yellow	36	132	medium blue
6	101	yellow	37	120	deep blue
7	104	deep amber	38	165	daylight blue
8	15	deep straw	39	161	slate blue
9	179	loving amber	40	118	light blue
10	21	gold amber	41	68	sky blue
11	105	orange	42	143	pale navy blue
12	158	deep orange	43	131	marine blue
13	22	dark amber	44	115	peacock blue
14	778	millenium gold	45	172	lagoon blue
15	135	deep golden amber	46	116	medium blue green
16	24	scarlet	47	90	dark yellow green
17	106	primary red	48	139	primary green
18	26	bright red	49	122	fern green
19	27	medium red	50	89	moss green
20	19	fire	51	124	dark green
21	157	pink	52	88	lime green
22	36	medium pink	53	138	pale green
23	111	dark pink	54	203	Quarter CT Blue
24	128	bright pink	55	202	Half CT Blue
25	148	bright rose	56	201	FULL CT Blue
26	332	special rose pink	57	200	double CT Blue

10. Regular maintenance

10.1 Cleaning and maintenance

Lighting fixtures require daily cleaning and maintenance, and their service life largely depends on the operating environment and standards. If you have any questions, please consult our technical engineers for advice. Maintenance and repair work not included in this book should be entrusted to our qualified technical engineers.

Attention! Damage caused by dust, e-liquid, or other reasons, as well as abnormal use, is not covered by the warranty.



Warning !

Before opening any lid, disconnect the power supply. Cleaning optical components requires gentle wiping as the coating surface is prone to scratching. Do not use damaging liquids or hard objects, as they may damage the plastic or coating surface.

- When the lens is cracked or otherwise damaged, it should be replaced in a timely manner;
- When the brightness significantly decreases, the LED may have reached its expiration date and should be replaced in a timely manner;
- When the fixture cannot start, please check if the fixture power fuse is blown. If it is blown, a fuse of the same specification must be used for installation;
- The fixture is equipped with a temperature protection device. When the temperature is too high, the protection device will automatically reduce power.
- When this situation occurs, please check whether the fan is running normally, whether the fan and fan mesh are clogged with dust, identify the fault and repair it before starting the fixture. Please note that only qualified technicians are allowed to carry out maintenance work;
- To maintain smooth movement of the focusing lens, it is recommended to lubricate the guide rail of the focusing lens every three months. Excellent and high-temperature resistant lubricating grease should be used, and excessive grease should not be used as it can easily dirty adjacent components.

10.2 Fault analysis and handling

Fault description	Analysis	Processing method
No action after power on	Check if the power switch is turned on	Turn on
	Check if the fuse is blown	Replace
	Check if the output of PSU is normal	Detecting voltage
	Check if poor contact in the internal circuit	Reconnect
Uncontrolled lighting fixtures	Check if the DMX signal cable is connected correctly (If there is no signal, the display screen will flash)	Reconnect or replace
	Check if the address code is correct and if the DMX mode of the lighting fixture matches the settings	Reconfirm
	The main control PCB is damaged	Replace

Not bright	LED aging or damage	Replace
	Power PCB malfunction	Check/ Replace
	Loose or poor contact of the circuit	Reconnect
	PSU malfunction	Replace
Automatically turn off or dim the lights	LED aging	Replace
	The temperature control switch is damaged	Replace
Weak light efficiency and uneven light spot	LED aging	Replace
	The optical mirror has accumulated dust or stains	Clean
	The optical mirror is damaged	Replace
Impure color	Weakening of light efficiency	Replace led PCB
	The color filter has accumulated dust or stains	Clean
	The color filter has been demolded or damaged	Replace



Attention! The above analysis is for abnormal reference only. Non professionals are not allowed to disassemble and repair the machine