

CKC

LIGHT IT LIKE IT



Tourist M5



Adopts 500W CW LED light source
 Total luminous flux 23,000 lumens
 Beam Angle 3.5~53° zoom
 CCT 6500K
 IP66 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

OPTIC

- Source: 500W CW LED
- Output: 23000 Lm
- Beam angle: 3.5 ~ 53°
- CCT: 6500K
- CRI: 72(With CRI filter)
- Lens diameter: 153 mm
- Lux: 30500 Lux@10m/3.5°
- Source lifetime: >20000 H

EFFECT

- Strobe: 1~25Hz
- LED refresh rate: 1200Hz~25KHz
- Rotation gobo wheel: 7 + 1
- Rotation gobo size: Outer diameter 23mm/Inner diameter 15mm/Thickness 1.1mm
- Fixed gobo wheel: 8 + 1
- Fixed gobo size: Outer diameter 23mm/Inner diameter 11mm/Thickness 1.1mm
- Color wheel: 7 + 1
- CMY + CTO
- Prism: 6 fact prism + 8 fact prism
- Frost: Light frost + Heavy frost
- Animation + With iris
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each brade can realize complete beam closing. The whole cutting module can be rotated by $\pm 60^\circ$

CONTROL & PROGRAM

- Channel: 38/56 CH
- Protocol: DMX512, RDM, ArtNet/sACN
- Data connector: 3PIN XLR, RJ45 In/Out
- Display: 2.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on
- NFC: The lighting fixtures do not require power on and can be directly set up, diagnosed, and perform other functions through the CKC app

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 994 W
- Power factor: 0.99

OTHER

- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 398 × 281 × 667 mm
- N.W: 30 kgs

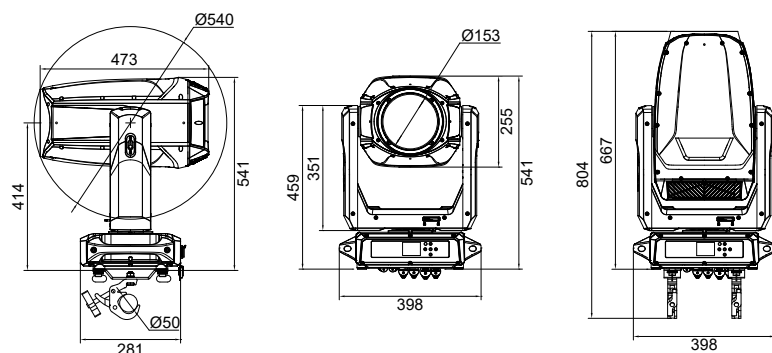

PHOTOMETRIC DATA

Distance(m)	0	8	15	30	50
3.5~53° CRI: 72					
Lux 3.5°		47900	13625	3406	1226
Diameter(m)		0.49	0.92	1.83	3.06
Lux 53°		1930	549	137	
Diameter(m)		7.98	14.96	29.91	

ROTATION GOBO



FIXED GOBO



COLOUR



FRAMING BLADES



ANIMATION



PRISM



FROST

