

CKC

LIGHT IT LIKE IT




FC Par 14



RGBAL+UV LED



OUTPUT



BEAM
ANGLE



13 Kinds
CHANNEL



512
DMX



RDM



142W



IP65

Adopts 14×20W RGBAL+UV LED

Beam angle: 13° (Optional: 25° / 40° / 60°)

Field angle: 25° (40° / 63° / 90°)

Output: 6200 Lm

IP65 / Resistant to salt corrosion

OPTIC

- Source: 14 × 20W RGBAL+UV LED
- Beam angle: 13° (Optional: 25° / 40° / 60°)
- Field angle: 25° (40° / 63° / 90°)
- Output: 6200 Lm
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25 Hz

CONTROL & PROGRAM

- Channel: 1 / 3 / 9 / 6 / 6-1 / 7 / 8 / 9-1 / 11 / 12 / 14 / 14-1 / 20 CH
- Protocol: DMX512, RDM
- Data connection: 3PIN XLR
- Display: O LED display

SOFTWARE

- Via DMX signal to update
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure
- Natural heat dissipation
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 142 W

OTHER


- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 344 × 260 × 247 mm
- N.W: 7.5 kgs

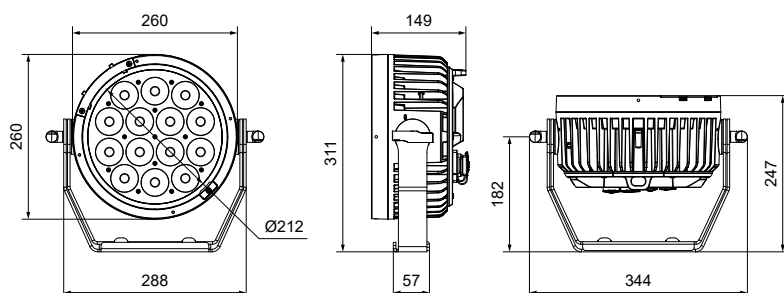

PHOTOMETRIC DATA

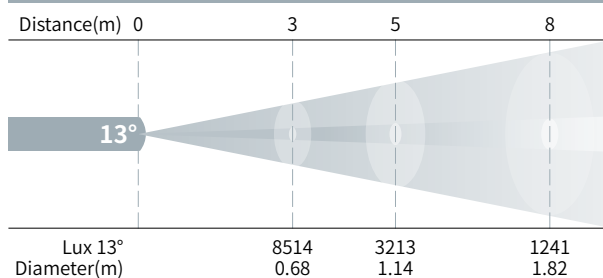

ACCESSORIES

