

CKC

LIGHT IT
LIVE IT




P200 FC IP



RGBAL LED



OUTPUT



BEAM
ANGLE



CCT



CRI



8 Kinds
CHANNEL



DMX



RDM



220W



IP65

Adopts 150W RGBAL LED
 Total luminous flux 5800 Lm
 Beam angle: 11° /22° /30° /52°
 Field angle: 23° /36° /40° /68°
 CCT: 2400K ~ 8500K
 CRI: 93
 IP rating: IP65
 Resistant to salt corrosion

OPTIC

- Source: 150W RGBAL LED
- Output: 5800 Lm
- Beam angle: 11° /22° /30° /52°
- Field angle: 23° /36° /40° /68°
- CCT: 2400K ~ 8500K
- CRI: 93
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25 Hz
- Dimmer Mode: 7 kinds
- Dimmer Cue: 4 kinds

CONTROL & PROGRAM

- Channel: 1 / 4 / 6 / 9 / 10 / 11 / 15 / 19 CH
- Protocol: DMX512, RDM
- Data connection: 3 PIN XLR
- Display: O LCD display

SOFTWARE

- Via DMX signal to update
- Intelligent temperature protection to ensure LED service life

HOUSING

- Die-cast aluminum construction
- Fan cooling (intelligent speed regulation)
- Resistant to salt corrosion

POWER CONSUMPTION



- Voltage: AC 100V~240V 50/60Hz
- Rated power: 220 W

OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 259 × 275 × 312 mm
- N.W: 5.4 kgs

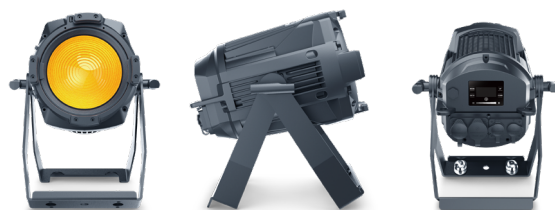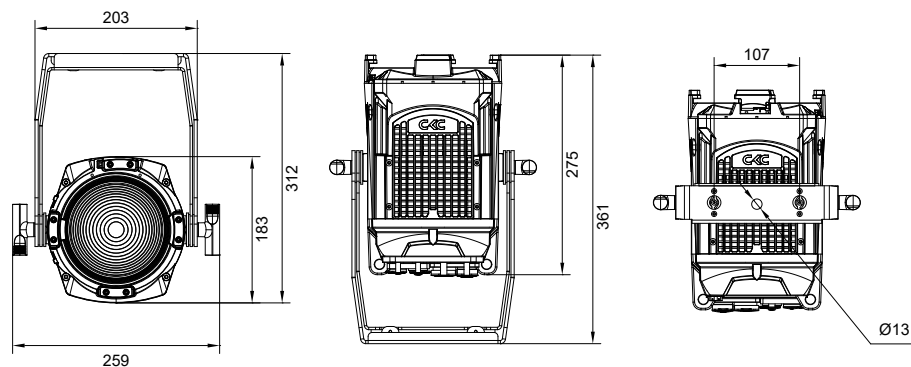

PHOTOMETRIC DATA

Distance(m)	0	3	5	8
Lux 23°		8380	3030	1210
Diameter(m)		1.17	1.94	3.11
Lux 36°		3500	1300	567
Diameter(m)		1.95	3.25	5.20
Lux 40°		4430	1760	471
Diameter(m)		2.18	3.64	5.82
Lux 68°		865	356	187
Diameter(m)		4.05	6.75	10.79