


LIGHT IT LIKE IT



Fresnel 400DW

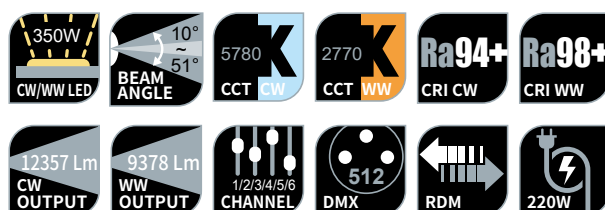

Adopts 350W WW+CW LED

Total luminous flux 12357 Lm (CW) / 9378 Lm(WW)

Beam angle: 10 ~ 51°

Field angle: 18 ~ 63°

CRI: 94 (CW) / 98 (WW)

CCT: 5780K (CW) / 2770 (WW)

TV station studio, professional stage, interview with reporters, shooting film and television lights, conference halls, etc.

OPTIC

- Source: 350W WW+CW LED
- Output: 12357 Lm (CW) / 9378 Lm(WW)
- CRI: 94 (CW) / 98 (WW)
- Beam angle: 10 ~ 51°
- Field angle: 18 ~ 63°
- CCT: 5780K (CW) / 2770 (WW)
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25 Hz
- Dimmer Mode: 4 kinds
- Dimmer Curve: 5 kinds

CONTROL & PROGRAM

- Channel: 1 / 2 / 3 / 4 / 5 / 6 CH
- Protocol: DMX512, RDM
- Data connector: 3 / 5 PIN XLR
- Display: 1602A LCD display

SOFTWARE

- Via USB & DMX signal to update
- Silent fan, intelligent speed regulation
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure
- Fan cooling

POWER CONSUMPTION

- Voltage: AC 100V~240V 50/60Hz
- Rated power: 220 W

OTHER


- IP rating: IP30
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 340 × 376 × 398 mm
- N.W: 9 kgs



PHOTOMETRIC DATA

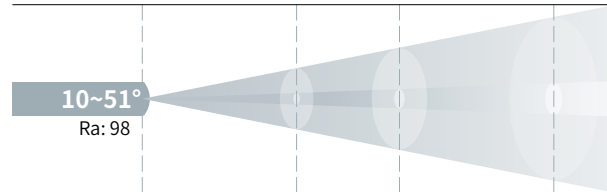Distance(m)	0	3	5	8
				
10~51° Ra: 98				
Lux 10°		16500	5180	2440
Diameter(m)		0.52	0.87	1.40
Lux 51°		2130	1030	450
Diameter(m)		2.86	4.77	7.63

