


LIGHT IT LIKE IT



## AK Storm Bar

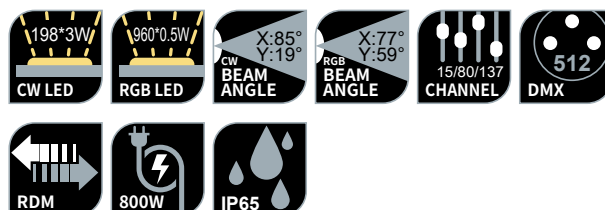

Adopts 960 x 0.5W RGB LED + 198 x 3W CW LED  
Output: 15200 Lm  
Rated power: 352 W  
Strobe power: 800 W  
Resistant to salt corrosion

OPTIC

- Source: 960 x 0.5W RGB LED + 198 x 3W CW LED
- Output: 15200 Lm
- RGB Beam angle: X: 77° Y: 59°
- CW Beam angle: X: 85° Y: 19°
- RGB Field angle: X: 118° Y: 103°
- CW Field angle: X: 117° Y: 66°
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25Hz
- LED refresh rate: 900Hz~25KHz
- Dimming Mode: 5
- Dimming Curve: 4

CONTROL & PROGRAM

- Channel: 15 / 80 / 137 CH
- Protocal: DMX512, RDM
- Data connector: 3 PIN XLR
- Display: OLED display

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V-240V 50/60HZ
- Rated power: 352 W
- Strobe power: 800 W

OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 1007 × 180 × 190 mm
- N.W: 10 kgs

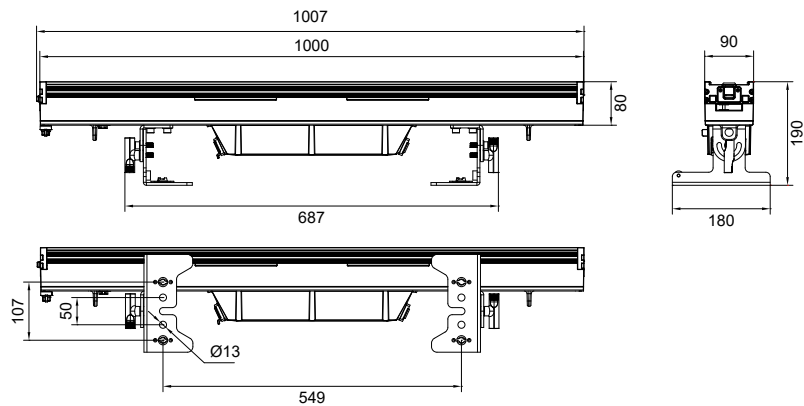

PHOTOMETRIC DATA

