



LIGHT IT LIKE IT



Proxima HYBRID



Adopts 500W laser source
 Total luminous flux 23,000 lumens
 Beam Angle 0.9° ~38° zoom
 CCT 8500K
 760000 Lux@10m
 IP66 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

OPTIC

- Source: 500W laser
- Output: 23000 Lm
- Beam angle: 0.9 ~ 17.3°
- Spot angle: 2.3 ~ 25.5°
- Wash angle: 3.7 ~ 38°
- CCT: 8500K
- Lens diameter: 180 mm
- Source lifetime: >20000 H
- Lux: 760000 Lux@10m

EFFECT

- Strobe: 1~25Hz
- Rotation gobo wheel: 12 + 1
- Rotation gobo size: Outer diameter 11mm/Inner diameter 5mm/Thickness 1.1mm
- Fixed gobo wheel: 22 + 1
- Color wheel: 17 + 1
- CMY
- Prism: Wheel 1(6 linear) / Wheel 2(8 fact prism + 12 fact prism + 24 fact prism)
- Frost: 1
- Animation

CONTROL & PROGRAM

- Channel: 29/36 CH
- Protocol: DMX512, RDM, ArtNet/sACN
- Data connector: 3PIN XLR, RJ45 In/Out
- Display: 2.4 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on
- NFC: The lighting fixtures do not require power on and can be directly set up, diagnosed, and perform other functions through the CKC app

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: Infinite rotation (360°)
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 650 W
- Power factor: 0.99

OTHER

- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT


- Size: 423 × 286 × 688 mm
- N.W: 33 kgs(Normal version) / 34.2 kgs(Integrated clamp version)

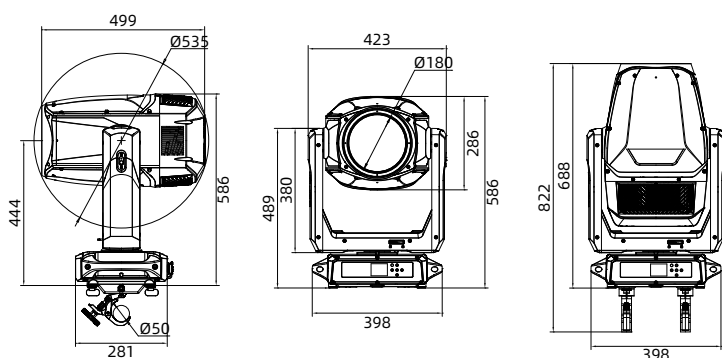

PHOTOMETRIC DATA

Distance(m)	0	10	15	30	50	100
0.9~25.5°						
Lux 0.9°		760000	370000	84500	30400	7600
Diameter(m)		0.16	0.24	0.47	0.79	1.57
Lux 2.3°		400000	150000	37300	13400	3360
Diameter(m)		0.40	0.60	1.20	2.01	4.01
Lux 17.3°		3864	1910	530	191	
Diameter(m)		3.04	4.56	9.13	15.21	
Lux 25.5°		3180	1613	449	161	
Diameter(m)		4.53	6.79	13.58	22.63	

ROTATION GOBO

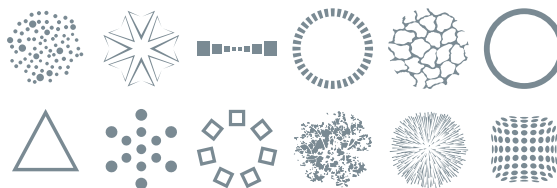

FIXED GOBO



COLOUR



ANIMATION



PRISM



FROST

