



LIGHT IT LIKE IT



V4



Adopts 350W CW LED
 Total luminous flux 15,000 lumens
 Beam Angle 3° ~53° zoom
 CCT 6800K

OPTIC

- Source: 350W CW LED
- Output: 15000 Lm
- Beam angle: 3 ~ 53°
- CCT: 6800K
- CRI: 72 (With CRI filter)
- Lux: 32900 Lux@8m
- Lens diameter: 135 mm
- Source lifetime: 20000 H

EFFECT

- Strobe: 1~25Hz
- LED refresh rate: 900Hz~25KHz
- Rotation gobo wheel: 7 + 1
- Gobo size: Outer diameter 16.5mm/Inner diameter 11.5mm/Thickness 1.1mm
- Color wheel: 8 + 1
- CMY + CTO
- Prism: 8 fact prism + 6 linear
- Frost: Light frost + Heavy frost
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each brade can realize complete beam closing. The whole cutting module can be rotated by $\pm 60^\circ$
- Animation + With iris

CONTROL & PROGRAM

- Channel: 38CH/52CH
- Protocol: DMX512, RDM
- Data connector: 3/5PIN XLR
- Display: 1.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on

SOFTWARE

- Via USB & DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 660 W
- Power factor: 0.99

OTHER

- IP rating: IP30
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 362 × 233 × 637 mm
- N.W: 22 kgs

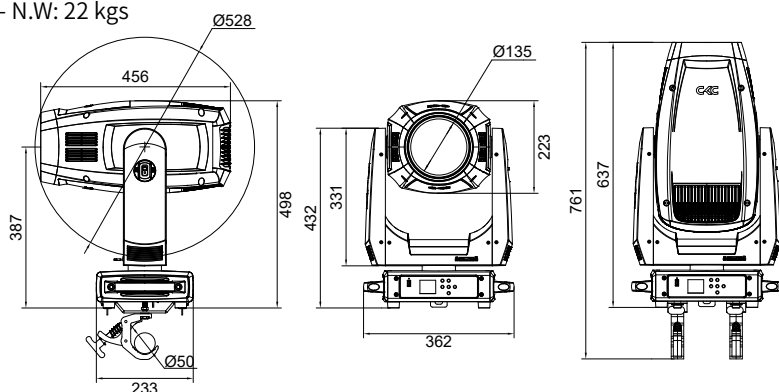

PHOTOMETRICAL DATA

Distance(m)	0	5	8	10	12
Lux 3°		84100	32900	21200	14900
Diameter(m)		0.26	0.42	0.52	0.63
Lux 53°		1000	443	310	204
Diameter(m)		4.99	7.98	9.97	11.97

ROTATION GOBO



COLOUR



ANIMATION



PRISM



FROST

