


CKC

LIGHT IT LIKE IT



V15

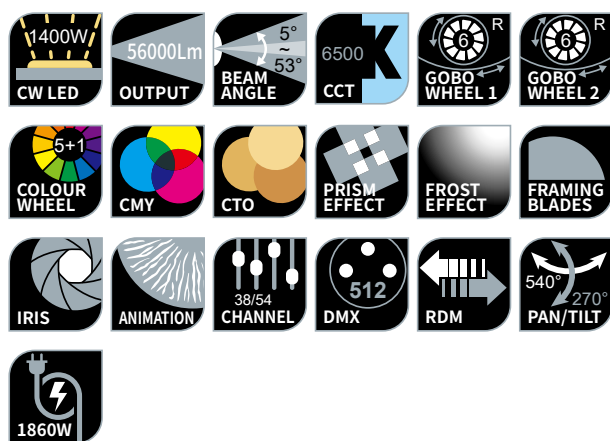

Adopts 1400W CW LED
 Total luminous flux 56,000 lumens
 Beam Angle 5° ~53°
 CCT 6500K

OPTIC

- Source: 1400W CW LED
- Output: 56000 Lm
- Beam angle: 5 ~ 53°
- CCT: 6500K
- CRI: 72
- Lens diameter: 182 mm
- Source lifetime: >20000 H

EFFECT

- Strobe: 1~25Hz
- LED refresh rate: 1200Hz~25KHz
- Rotation gobo: Wheel 1 (6 + 1) / Wheel 2 (6 + 1)
- Gobo size: Outer diameter 30mm/Inner diameter 25mm/Thickness 1.1mm
- Color wheel: 5 + 1
- CMY + CTO
- Prism: 4 fact prism + 6 linear
- Frost: Light frost + Heavy frost
- Animation + With iris
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each brade can realize complete beam closing. The whole cutting module can be rotated by $\pm 60^\circ$

CONTROL & PROGRAM

- Channel: 38/54 CH
- Protocal: DMX512, RDM
- Data connector: 3/5PIN XLR
- Display: 2.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on

SOFTWARE

- Via DMX & USB signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 1860 W
- Power factor: 0.99

OTHER

- IP rating: IP30
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT


- Size: 448×331×800 mm
- N.W: 42.8 kgs

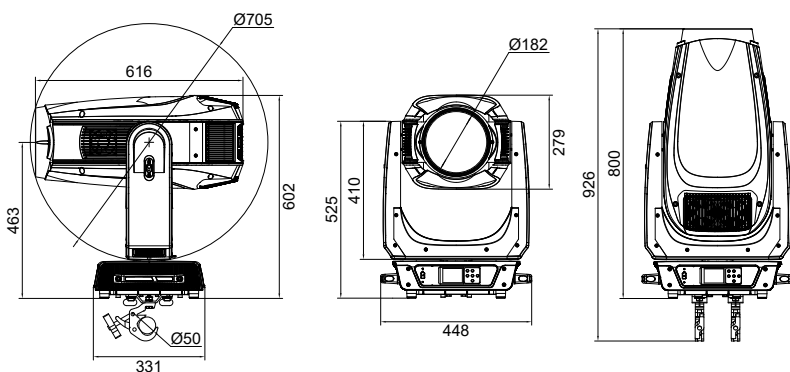


PHOTOMETRICAL DATA

Distance(m)	0	8	15	30	50	100
Lux 5°		54688	15556	3889	1400	150
Diameter(m)		0.70	1.31	2.62	4.37	8.73
Lux 53°		1410	401	100	36	
Diameter(m)		8.00	14.96	29.91	49.86	

ROTATION GOBO

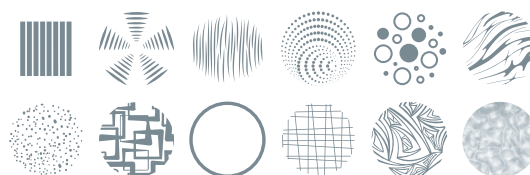

COLOUR

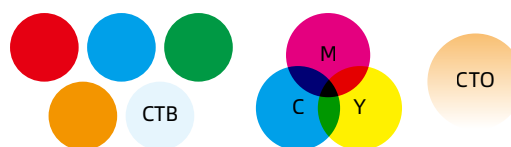

FRAMING BLADES



ANIMATION



PRISM



FROST

