

CKC

LIGHT IT LIKE IT




ZB7X IP



RGBW LED



OUTPUT



BEAM ANGLE



CCT



CHANNEL



DMX



RDM



ARTNET/SACN



PAN/TILT



550W



IP65

Adopts 7 × 60W RGBW LED light source
 Total luminous flux 5,700 lumens
 Beam Angle 4° ~54° zoom
 CCT 2700 ~ 10000K
 Uniform RGBW color mixing system and rainbow effect
 Rich color mixing effect, linear adjustable color temperature
 IP65 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

OPTIC

- Source: 7 × 60W RGBW LED(OSRAM)
- Output: 5700 Lm
- Zoom Range: 4~54°
- CCT: 2700~10000 K
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25Hz
- Uniform RGBW color mixing system and rainbow effect, single point LED control
- Create unlimited dynamic, unlimited color changes

CONTROL & PROGRAM

- Channel: 17 / 21 / 45 CH
- Protocol: DMX512, RDM, ArtNet/sACN
- Data connector: 3PIN XLR, RJ45 In/Out
- Display: 1.8 LCD screen the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on

SOFTWARE

- Via USB & DMX signal to update
- Silent fan, intelligent speed regulation
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 550 W
- Power factor: 0.99

OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Start-up environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 358 × 239 × 465 mm
- N.W: 16 kgs

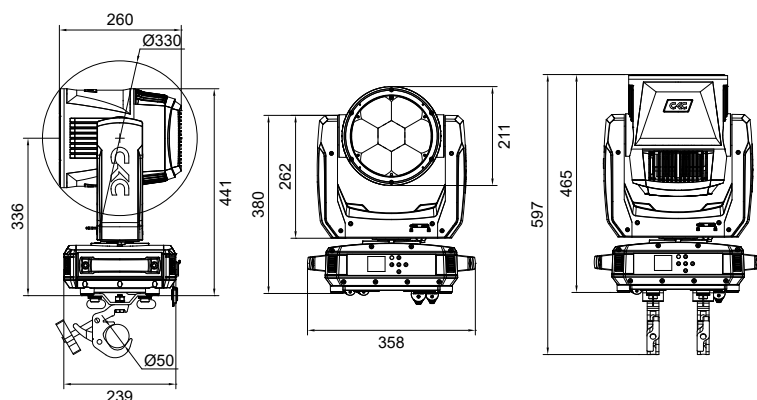

PHOTOMETRIC DATA

Distance(m)	0	8	10	15	20
Lux 4°		6650	4220	1891	1064
Diameter(m)		0.56	0.70	1.05	1.40
Lux 54°		261	179	74	42
Diameter(m)		8.15	10.19	15.29	20.38