




LIGHT IT LIKE IT



Y1640

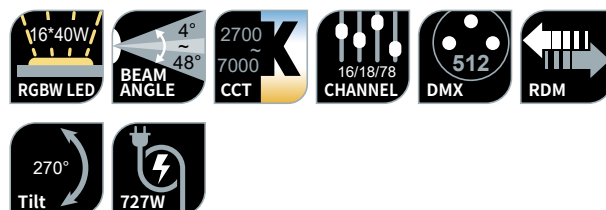

Adopts 16 × 40W RGBW LED light source
 Beam Angle 4° ~48° zoom
 2700 ~ 7000 K

OPTIC

- Source: 16 × 40W RGBW LED
- Beam angle: 4 ~ 60°
- CCT: 2700 ~ 7000 K
- Source lifetime: >20000 H

EFFECT

- Strobe: 1~25Hz
- Uniform RGBW color mixing system and rainbow effect, single point LED control
- Create unlimited dynamic, unlimited color changes

CONTROL & PROGRAM

- Channel: 16/18/78 CH
- Protocol: DMX512, RDM
- Data connector: 3PIN XLR
- Display: OLED DISPLAY

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

TILT MOVEMENT

- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 727 W

OTHER

- IP rating: IP30
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 1062 × 150 × 291 mm
- N.W: 23.5 kgs

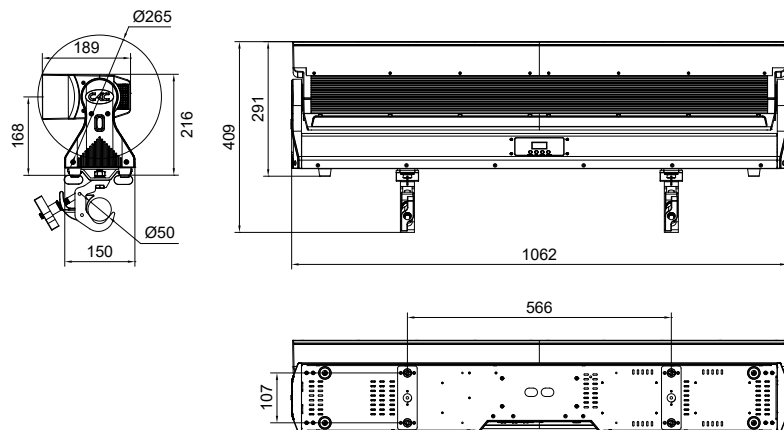

PHOTOMETRICAL DATA

Distance(m)	0	1	3	5
Lux 4°		34270	9843	5748
Diameter(m)		0.07	0.21	0.35
Lux 48°		7649	1398	573
Diameter(m)		0.89	2.67	4.45