

# LIGHT IT LIKE IT



## EvoWash Pro



Adopts 12 × 60W RGBL LED light source  
 Total luminous flux 13,000 lumens  
 Beam Angle 5.5° ~45° zoom  
 CCT 2400 ~ 8500K  
 IP66 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

#### OPTIC

- Source: 12 × 60W RGBL LED
- Output: 13000 Lm
- Beam angle: 5.5 ~ 45°
- CCT: 2400 ~ 8500K
- Source lifetime: >20000 H



#### EFFECT

- Strobe: 1~25Hz
- Uniform RGBL color mixing system and rainbow effect, single point LED control
- Create unlimited dynamic, unlimited color changes

#### CONTROL & PROGRAM

- Channel: 21/28/68 CH
- Protocol: DMX512, RDM, ArtNet/sACN
- Data connector: 3PIN XLR, RJ45 In/Out
- Display: 1.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on
- NFC: The lighting fixtures do not require power on and can be directly set up, diagnosed, and perform other functions through the CKC app



#### SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

#### PAN & TILT MOVEMENT

- Pan & Tilt: infinite rotation (360°)

#### HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

#### POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 730 W

#### OTHER

- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

#### SIZE & WEIGHT

- Size: 361 × 258 × 445 mm
- N.W: 16.5 kgs

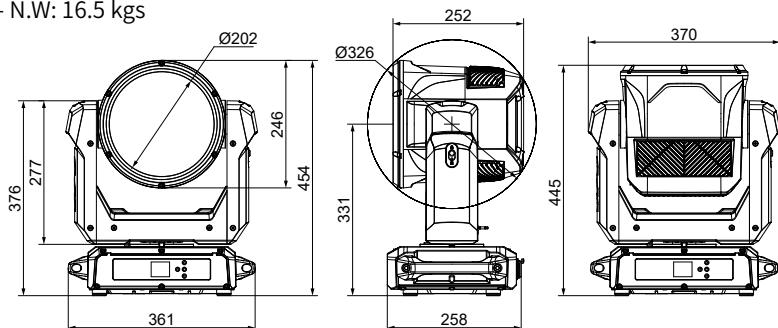

#### PHOTOMETRICAL DATA

Distance(m)	0	8	15	20	30
5.5~45°					
Lux 5.5°	12539	3567	2006	892	
Diameter(m)	0.77	1.44	1.92	2.88	
Lux 45°	695	198	111		
Diameter(m)	6.63	12.43	16.57		