

CKC

LIGHT IT LIKE IT



EvoWash Air



Adopts 4 × 60W RGBL LED light source
 Total luminous flux 4,500 lumens
 Beam Angle 5° ~51° zoom
 CCT 2400 ~ 8500K
 IP66 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

OPTIC

- Source: 4 × 60W RGBL LED
- Output: 4500 Lm
- Beam angle: 5 ~ 51°
- CCT: 2400 ~ 8500K
- Source lifetime: >20000 H



EFFECT

- Strobe: 1~25Hz
- Uniform RGBL color mixing system and rainbow effect, single point LED control
- Create unlimited dynamic, unlimited color changes

CONTROL & PROGRAM

- Channel: 21/28/36 CH
- Protocol: DMX512, RDM, ArtNet/sACN
- Data connector: 3PIN XLR, RJ45 In/Out
- Display: 1.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on
- NFC: The lighting fixtures do not require power on and can be directly set up, diagnosed, and perform other functions through the CKC app



SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan & Tilt: infinite rotation (360°)

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 320 W

OTHER

- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 298 × 205 × 362 mm
- N.W: 8.9 kgs

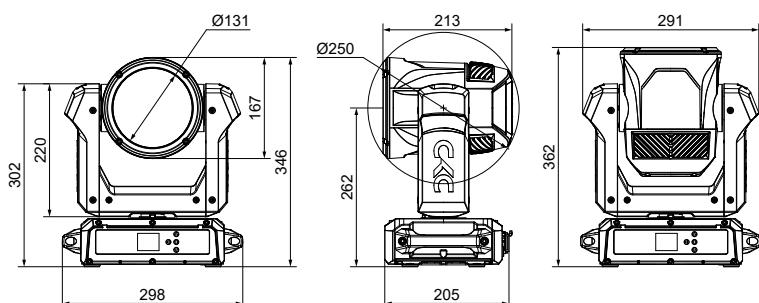

PHOTOMETRICAL DATA

Distance(m)	0	8	15	20	30
5~51°					
Lux 5°	4531	1289	725	322	
Diameter(m)	0.70	1.31	1.75	2.62	
Lux 51°	169	48	27		
Diameter(m)	7.63	14.31	19.08		