

LIGHT IT LIKE IT



# V8 IP

- 800W CW LED
- 41000Lm OUTPUT
- 6° ~ 53° BEAM ANGLE
- 6500 K CCT
- Ra72+ CRI
- 6 R GOBO WHEEL
- F GOBO WHEEL
- 6+1 COLOUR WHEEL
- CMY
- CTO
- PRISM EFFECT
- FROST EFFECT
- FRAMING BLADES
- IRIS
- ANIMATION
- 36/52 CHANNEL
- 512 DMX
- RDM
- 540° / 270° PAN/TILT
- 1268W
- IP65

Adopts 800W CW LED light source  
 Total luminous flux 41,000 lumens  
 Beam Angle 6° ~53° zoom  
 CCT 6500K  
 IP65 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

### OPTIC

- Source: 800W CW LED
- Output: 41000 Lm
- Beam angle: 6 ~ 53°
- CCT: 6500K
- CRI: 72 (Optional 90)
- Lens diameter: 154 mm
- Source lifetime: > 20000 H

### EFFECT

- Strobe: 1~25Hz
- Rotation gobo wheel: 6 + 1
- Fixed gobo wheel: 7 + 1
- Gobo size: Outer diameter 30mm/Inner diameter 25mm/Thickness 1.1mm
- Color wheel: 6 + 1
- Linear CMY 、 Linear CTO (2400~6500K)
- Prism: 4 fact prism + 6 linear
- Frost: Light frost + Heavy frost
- Animation + With iris
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each blade can realize complete beam closing. The whole cutting module can be rotated by ±60°

### CONTROL & PROGRAM

- Channel: 36/52 CH
- Protocol: DMX512, RDM
- Data connector: 3PIN XLR
- Display: 2.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on

### SOFTWARE

- Via USB & DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

### PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

### HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

### POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 1268 W

### OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

### SIZE & WEIGHT

- Size: 503 × 360 × 819 mm
- N.W: 49 kgs

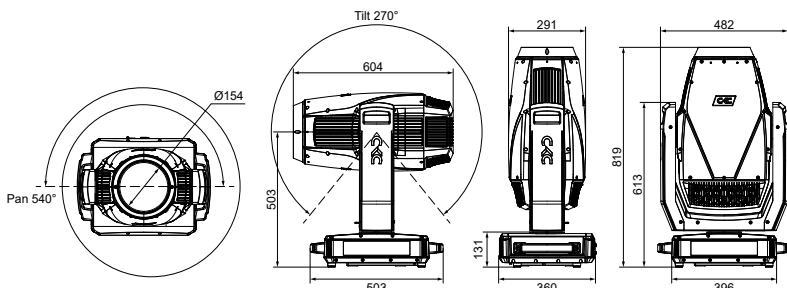

### PHOTOMETRICAL DATA

Distance(m)	0	8	15	30	50	100
Lux 6°		33270	10530	2093	753	213
Diameter(m)		0.84	1.57	3.14	5.24	10.48
Lux 53°		1519	420	90	39	
Diameter(m)		7.98	14.96	29.91	46.86	


### ROTATION GOBO



### FIXED GOBO



### COLOUR

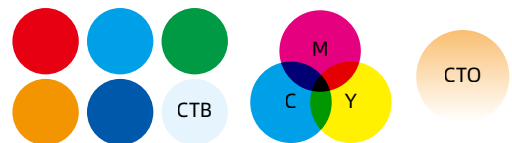

### FRAMING BLADES



### ANIMATION



### PRISM



### FROST

