

LIGHT IT
LIVE IT



FC Pendant 200

| | | | | | |
|---|---|---|---|--|--|
|  <p>7x3.5W RGBW LED</p> |  <p>6800 Lm OUTPUT</p> |  <p>36° BEAM ANGLE</p> |  <p>2400~ 8500 CCT</p> |  <p>8 Kinds CHANNEL</p> |  <p>512 DMX</p> |
|  <p>RDM</p> |  <p>150W</p> | | | | |

Adopts 72×3.5W RGBWL LED

Beam angle: 36°

Field angle: 79°

Output: 6800 Lm

CCT: 2400 ~ 8500K

OPTIC

- Source: 72×3.5W RGBWL LED
- Output: 6800 Lm
- Beam angle: 36°
- Field angle: 79°
- CCT: 2400K~8500K
- Source lifetime: >20000 H

EFFECT

- Strobe: 1~25Hz
- Dimmer curve: 4 kinds

CONTROL & PROGRAM

- Channel: 1CH/4CH/5CH/10CH/10CH/17CH/4CH/9CH
- Protocol: DMX512、RDM
- Data connector: 3 PIN XLR
- Display: Touch screen display operation panel
- Automatic color calibration system to ensure stable and consistent color and color temperature

SOFTWARE

- Via DMX signal to update
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure
- Natural heat dissipation

POWER CONSUMPTION


- Voltage: AC 110V-240V 50/60Hz
- Rated power: 150 W
- Power factor: 0.99

OTHER


- IP rating: IP30
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 197 × 197 × 299 mm
- N.W: 5.2 kgs

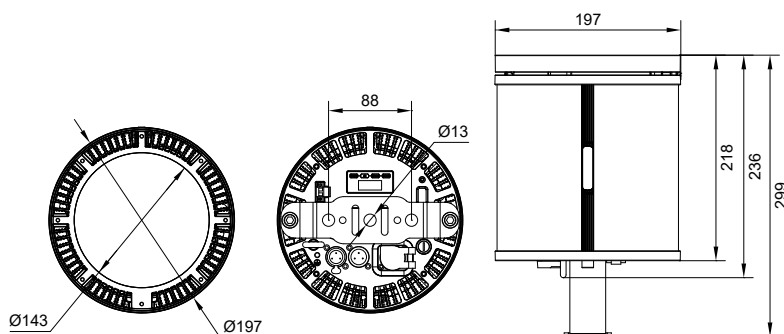

PHOTOMETRICAL DATA

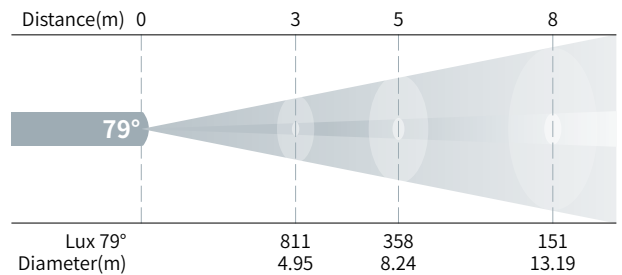

ACCESSORIES

