

LIGHT
LUMEN
LUMEN



Pendant 300



Adopts 180W CW LED
 Field angle: 35° /65° /90° /95°
 CCT: 3000K /4000K /5700K(Optional)
 CRI: 97

OPTIC

- Source: 180W CW LED
- Beam angle: 20° /35° /45° /55° (Optional)
- Field angle: 35° /65° /90° /95°
- CCT: 3000K/4000K/5700K(Optional)
- CRI: 97
- Source lifetime: >20000 H

EFFECT

- Strobe: 1~25Hz
- Dimmer Curve: 4 kinds
- Built in effects: 3 kinds

CONTROL & PROGRAM

- Channel: 1 / 2 / 4 CH
- Protocol: DMX512, RDM
- Data connector: 3 PIN XLR
- Display: touch display

SOFTWARE

- Via DMX signal to update
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure
- Natural heat dissipation

POWER CONSUMPTION


- Voltage: AC 100V-240V 50/60HZ
- Rated power: 240W

OTHER

- IP rating: IP30
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 197 × 197 × 400 mm
- N.W: 7.3 kgs

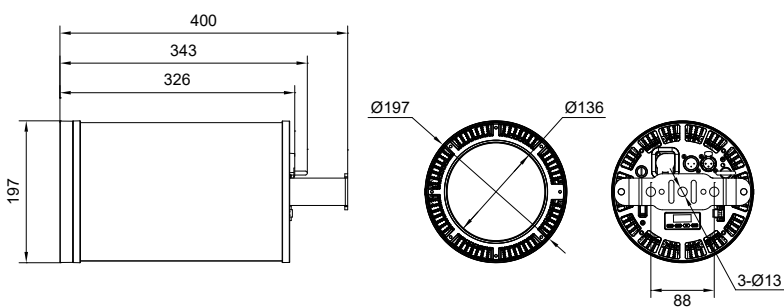

ACCESSORIES

