

CCC

LIGHT IT LIKE IT



EvoWash Pro



Adopts 12 × 60W RGBL LED light source
 Total luminous flux 14,200 lumens
 Beam Angle 4° ~60° zoom
 CCT 2400 ~ 8500K
 Ra: 85, R9>90
 IP66 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

OPTIC

- Source: 12 × 60W RGBL LED
- Output: 14200 Lm
- Beam angle: 4 ~ 60°
- CCT: 2400 ~ 8500K
- Source lifetime: >20000 H
- Ra: 85, R9>90

EFFECT

- Strobe: 1~25Hz
- Uniform RGBL color mixing system and rainbow effect, single point LED control
- Create unlimited dynamic, unlimited color changes

CONTROL & PROGRAM

- Channel: 21/25/69 CH
- Protocol: DMX512, RDM, ArtNet/sACN
- Data connector: 3PIN XLR, RJ45 In/Out
- Display: 1.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on
- NFC: The lighting fixtures do not require power on and can be directly set up, diagnosed, and perform other functions through the CKC app

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan & Tilt: infinite rotation (360°)

HOUSING

- Aluminum alloy structure + Carbon Fiber
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 730 W

OTHER

- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 361 × 258 × 445 mm
- N.W: 15.9 kgs

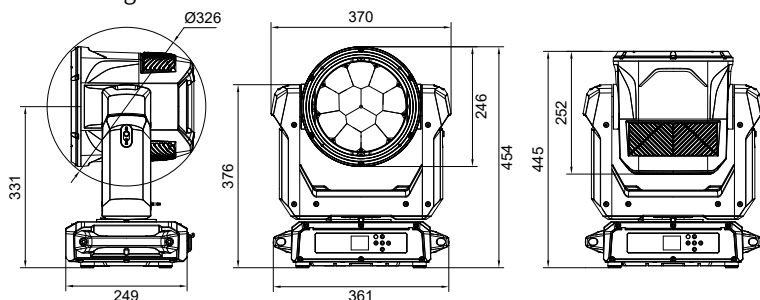

PHOTOMETRICAL DATA

Distance(m)	0	8	15	20	30
Lux 4°		12539	3567	2006	892
Diameter(m)		0.56	1.05	1.40	2.10
Lux 60°		695	198	111	
Diameter(m)		9.24	17.32	23.09	

4~60°