

CKC

# LIGHT IT LIKE IT



## EvoWash Air



Adopts 4 × 60W RGBL LED light source  
 Total luminous flux 4,900 lumens  
 Beam Angle 4° ~55° zoom  
 CCT 2400 ~ 8500K  
 IP66 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

### OPTIC

- Source: 4 × 60W RGBL LED
- Output: 4900 Lm
- Beam angle: 4 ~ 55°
- CCT: 2400 ~ 8500K
- Source lifetime: >20000 H

### EFFECT

- Strobe: 1~25Hz
- Uniform RGBL color mixing system and rainbow effect, single point LED control
- Create unlimited dynamic, unlimited color changes

### CONTROL & PROGRAM

- Channel: 21/25/37 CH
- Protocol: DMX512, RDM, ArtNet/sACN
- Data connector: 3PIN XLR, RJ45 In/Out
- Display: 1.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on
- NFC: The lighting fixtures do not require power on and can be directly set up, diagnosed, and perform other functions through the CKC app

### SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

### PAN & TILT MOVEMENT

- Pan & Tilt: infinite rotation (360°)

### HOUSING

- Aluminum alloy structure + Carbon Fiber
- Fan cooling
- Resistant to salt corrosion

### POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 320 W

### OTHER

- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

### SIZE & WEIGHT

- Size: 298 × 205 × 362 mm
- N.W: 8.6 kgs

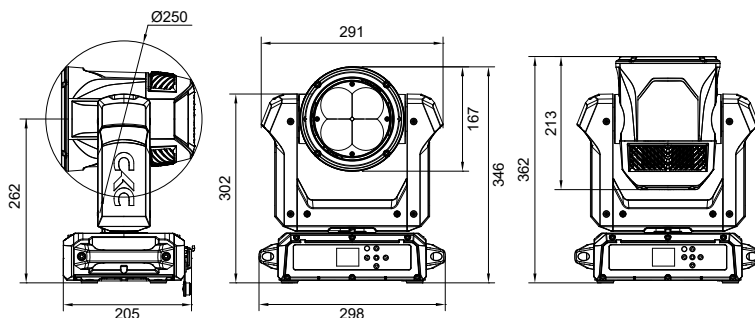

### PHOTOMETRICAL DATA

Distance(m)	0	8	15	20	30
Lux 4°		4531	1289	725	322
Diameter(m)		0.56	1.05	1.40	2.10
Lux 55°		169	48	27	
Diameter(m)		8.33	15.62	20.82	

