

LIGHT KIT



Fresnel 100DW



Adopts 100W WW+CW LED

Output: 6000 Lm

CCT: 2800K~6000K

Beam angle: 11° ~ 67°

CRI: 97

Suitable for TV station studios, press conference rooms, and other small to medium-sized venues

OPTIC

- Source: 100W WW+CW LED
- Output: 6000 Lm
- Zoom range: 11 ~ 67°
- CCT: 2800~6000K
- CRI: 97
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25 Hz
- Dimmer Curve: 2 kinds
- Dimmer Mode: 4 kinds

CONTROL & PROGRAM

- Channel: 1CH/2CH/3CH/4CH/5CH
- Protocol: DMX512, RDM
- Data connector: 3 PIN (or 5 PIN) XLR
- Display: 0802A LCD display

SOFTWARE

- Via DMX signal to update
- Silent fan, intelligent speed regulation
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure
- Fan cooling

POWER CONSUMPTION


- Voltage: AC 100V-240V 50/60HZ
- Rated power: 117 W

OTHER

- IP rating: IP30
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 309 × 330 × 392 mm
- N.W: 6.2 kgs

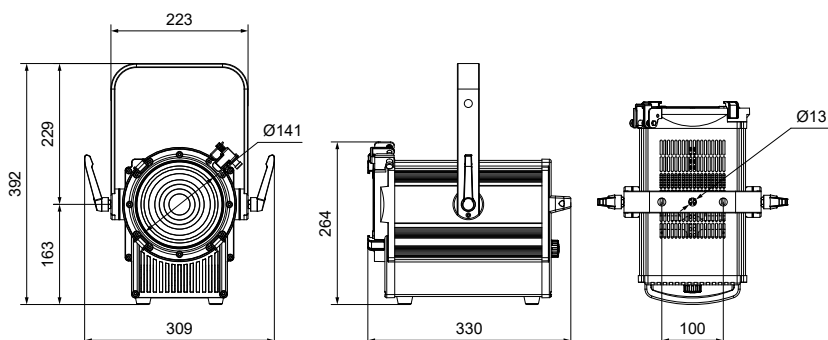

PHOTOMETRICAL DATA

Distance(m)	0	3	5	8
Lux 11°		4416	1651	650
Diameter(m)		0.58	0.96	1.54
Lux 67°		697	147	96
Diameter(m)		3.97	6.62	10.59