

LIGHT IT



Profile 300



Adopts 300W WW LED
 Beam angle: 5° /10° /14° /19° /26° /36° /50° /15 ~ 30° /25 ~ 50° (Optional)
 CCT: 3200K/4500K/5600K(Optional)
 CRI: 95
 Output: 9000 Lm
 Framing: Manual

OPTIC

- Source: 300W WW LED
 - Beam angle: 5° /10° /14° /19° /26° /36° /50° /15 ~ 30° /25 ~ 50° (Optional)
 - CCT: 3200K/4500K/5600K(Optional)
 - CRI: 95
 - Output: 9000 Lm
 - Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25Hz
 - Framing: Manual
 - DimCurve: 4 kinds

CONTROL & PROGRAM

- Channel: 1 / 3 / 4 CH
 - Protocol: DMX512, RDM
 - Data connector: 3 PIN XLR
 - Display: OLED display

SOFTWARE

- Via DMX signal to update
 - Silent fan, intelligent speed regulation
 - Intelligent temperature protection to ensure LED service life

HOUSING

- Structure of metal injection molded parts
 - Fan cooling

POWER CONSUMPTION


- Voltage: AC 100V ~ 240V 50/60Hz
 - Rated power: 262 W

OTHER

- IP rating: IP30
 - Work environment: -40°C ~ 45°C
 - Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 683 × 302 × 456 mm
 - N.W: 9.1 kgs

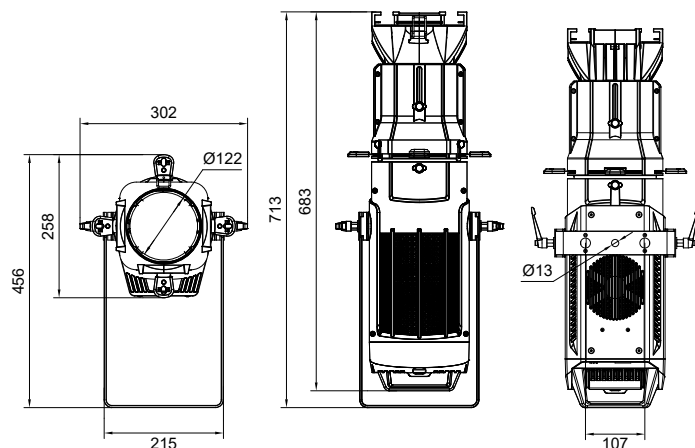

PHOTOMETRIC DATA

Distance(m)	0	3	5	8	12
5°/10°/14° /19°/26°/ 36°/50° CRI: 95					
Lux 5°					3828
Diameter(m)					1.05
Lux 10°					2496
Diameter(m)					2.10
Lux 14°	16390	5922	2424		
Diameter(m)	0.74	1.23	1.96		
Lux 19°	10300	3899	1627		
Diameter(m)	1.00	1.67	2.68		
Lux 26°	8895	3106	1352		
Diameter(m)	1.39	2.31	3.69		
Lux 36°	4691	1790	756		
Diameter(m)	1.95	3.25	5.20		
Lux 50°	2592	943	423		
Diameter(m)	2.80	4.66	7.46		

Accessories

