





LIGHT IT LIKE IT

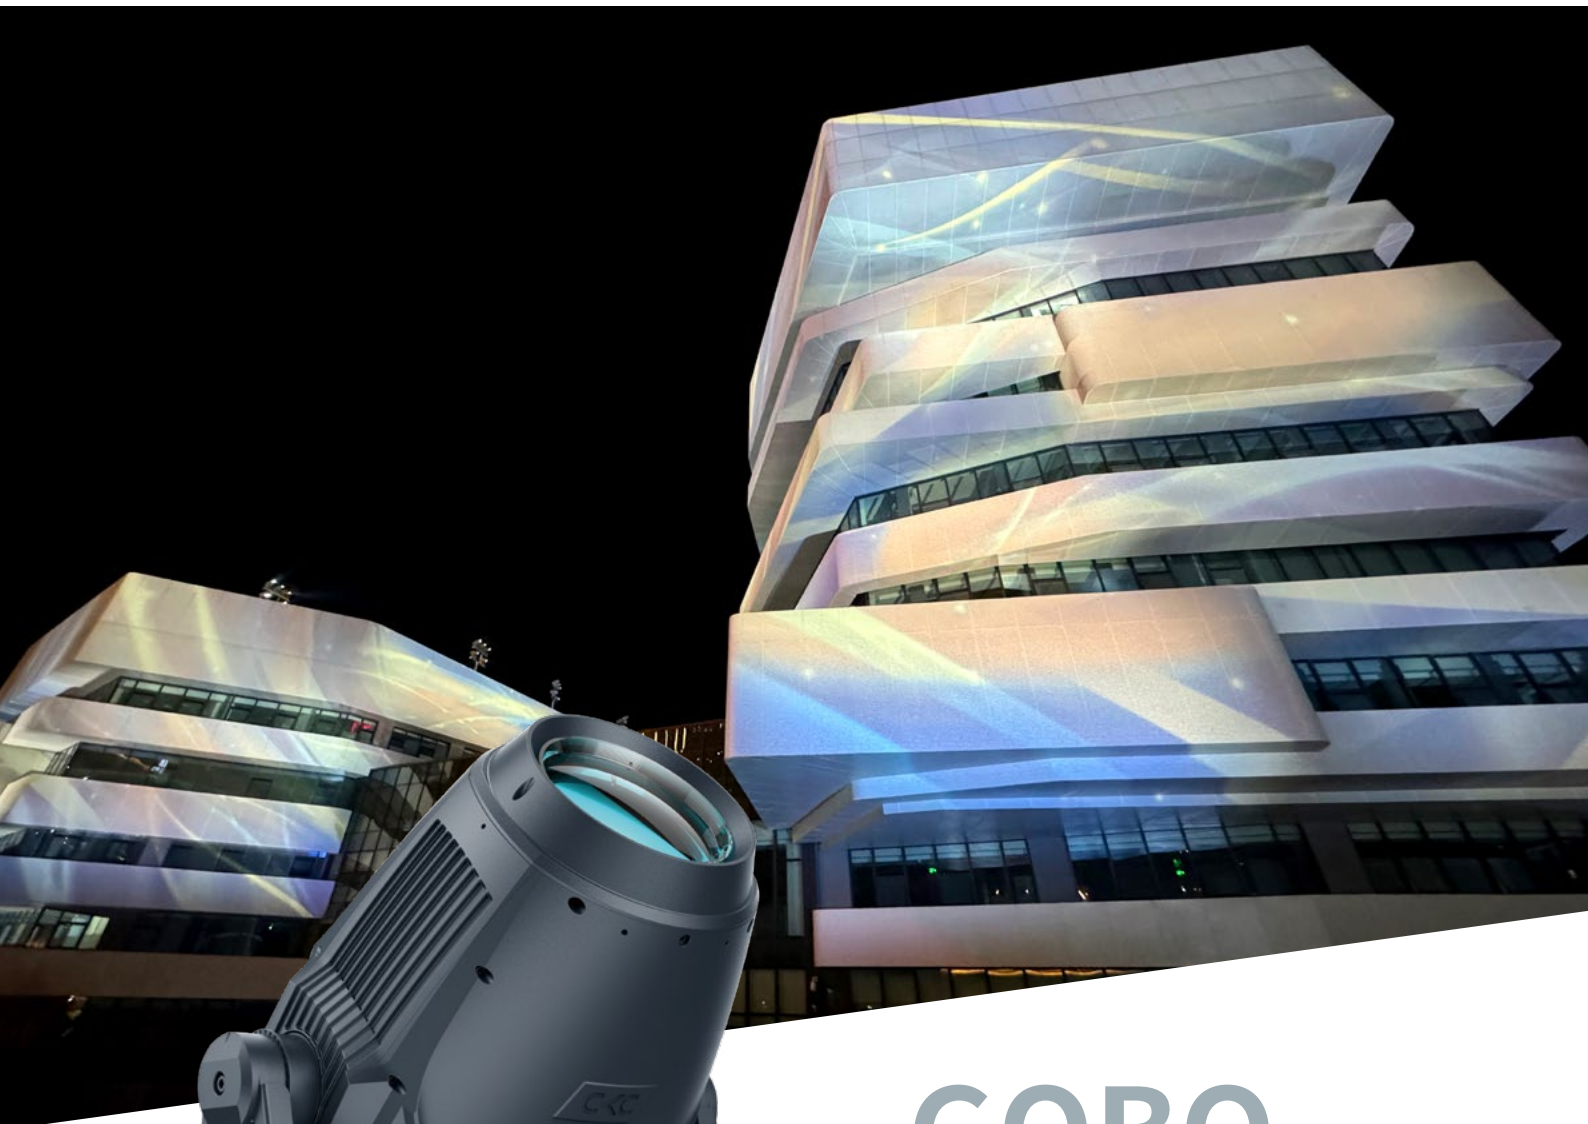

GOBO Projector 1000

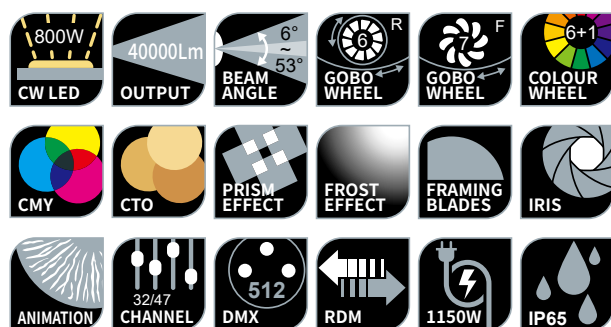

Adopts 800W CW LED light source
 Total luminous flux 40,000 lumens
 10530 Lux@15m
 Rotation gobo wheel/Fixed gobo wheel/Color wheel/CMY/CTO
 IP65 rating

OPTIC

- Source: 800W CW LED
- Output: 40000 Lm
- Beam angle: 6 ~ 53°
- Lux: 10530 Lux@15m
- CRI: 72 (Optional 90)
- Source lifetime: > 20000 H

EFFECT

- Strobe: 1~25Hz
- Rotation gobo wheel: 6 + 1
- Fixed gobo wheel: 7 + 1
- Gobo size: Outer diameter 30mm/Inner diameter 25mm/Thickness 1.1mm
- Color wheel: 6 + 1
- Linear CMY 、 Linear CTO (2600~6500K)
- Prism: 4 fact prism + 6 linear
- Frost: Light frost + Heavy frost
- Animation + With iris
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each brade can realize complete beam closing. The whole cutting module can be rotated by $\pm 60^\circ$

CONTROL & PROGRAM

- Channel: 32/47 CH
- Protocol: DMX512, RDM
- Data connector: 3PIN XLR
- Display: LCD display

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 1150 W

OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 552 × 291 × 720 mm
- N.W.: 35 kgs

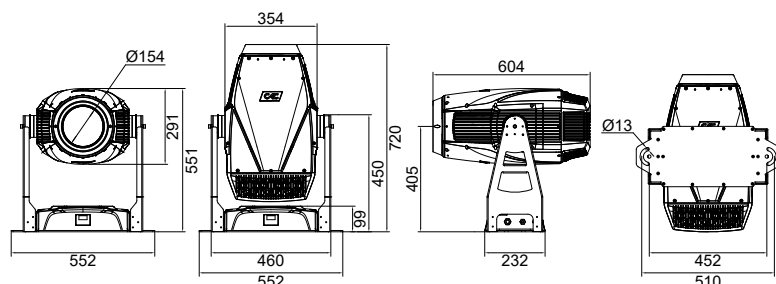

PHOTOMETRICAL DATA

Distance(m)	0	8	15	30	50	100
6~53° CRI: 72						
Lux 6°		33270	10530	2093	753	213
Diameter(m)		0.84	1.57	3.14	5.24	10.48
Lux 53°		1519	420	90	39	
Diameter(m)		7.98	14.96	29.91	46.86	


ROTATION GOBO



FIXED GOBO



COLOUR

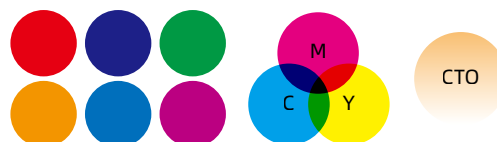

FRAMING BLADES



ANIMATION



PRISM



FROST

