

# LIGHT TICKET



## L Par 7



Adopts 7×20W RGBL LED  
 Field angle: 20°  
 Output: 4,150 Lm  
 IP65 / Resistant to salt corrosion

OPTIC

- Source: 7 × 20W RGBL LED
- Beam angle: 11°
- Field angle: 20°
- Output: 4150 Lm
- CCT: 2700 ~ 6500K
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25 Hz
- LED refresh rate: 900Hz~25KHz

CONTROL & PROGRAM

- Channel: 4CH / 7CH / 8CH / 10CH / 13CH / 16 CH
- Protocol: DMX512, RDM
- Data connection: 3PIN XLR
- Display: LCD display

SOFTWARE

- Via DMX signal to update
- Intelligent temperature protection to ensure LED service life

HOUSING

- Die-cast aluminum construction
- Fan cooling (Intelligent speed regulation)
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 110 W

OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 258 × 176 × 264 mm
- N.W: 3.5 kgs

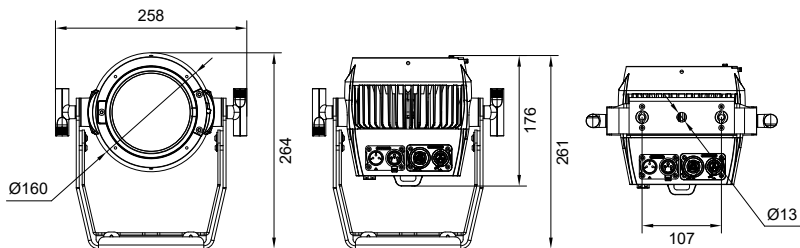

PHOTOMETRICAL DATA

