


LIGHT TUBE



L Par 12



Adopts 12×20W RGBL LED
 Beam angle: 9°
 Field angle: 19°
 Output: 6,800 Lm
 IP65 / Resistant to salt corrosion

OPTIC

- Source: 12 × 20W RGBL LED
- Beam angle: 9°
- Field angle: 19°
- Output: 6800 Lm
- CCT: 2700 ~ 6500K
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25 Hz
- LED refresh rate: 900Hz~25KHz

CONTROL & PROGRAM

- Channel: 4CH / 7CH / 8CH / 10CH / 13CH / 16 CH
- Protocol: DMX512, RDM
- Data connection: 3PIN XLR
- Display: O LED display

SOFTWARE

- Via DMX signal to update
- Intelligent temperature protection to ensure LED service life

HOUSING

- Die-cast aluminum construction
- Fan cooling (Intelligent speed regulation)
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 185 W

OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 300 × 196 × 298 mm
- N.W: 5.5 kgs

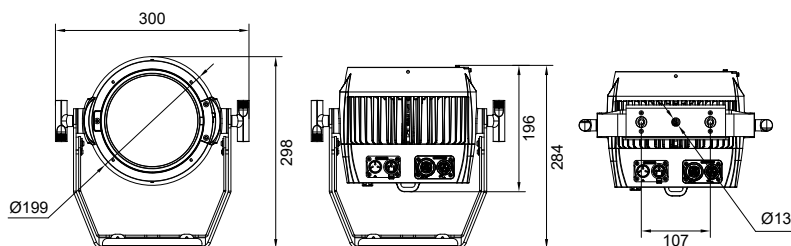

PHOTOMETRICAL DATA

