


LIGHT IT LIKE IT



AK Blast

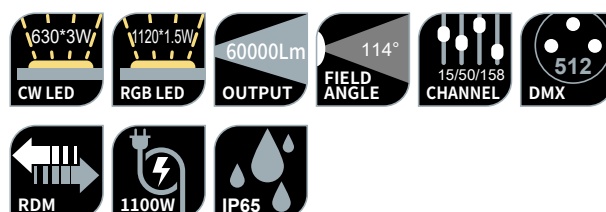

Adopts 1120 × 1.5W RGB LED + 630 × 3W CW LED

Output: 60000 Lm

Strobe power 1100 W

Resistant to salt corrosion

OPTIC

- Source: 1120 × 1.5W RGB LED
630 × 3W CW LED
- Beam angle: 68°
- Field angle: 114°
- Output: 60000 Lm
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25Hz
- LED refresh rate: 900Hz~25KHz
- Dimmer Mode: 5 kinds
- Dimmer Curve: 4 kinds
- Built in effects: 6 kinds

CONTROL & PROGRAM

- Channel: 15CH / 50CH / 158CH
- Protocol: DMX512, RDM
- Data connector: 3PIN XLR
- Display: OLED display

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 540W
- Strobe power: 1100W

OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 425 × 262 × 175 mm
- N.W.: 11.4 kgs

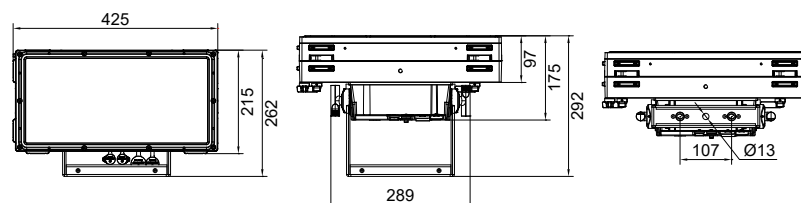

PHOTOMETRIC DATA

