


# LIGHT TUBE



## PixBar 1515 IP

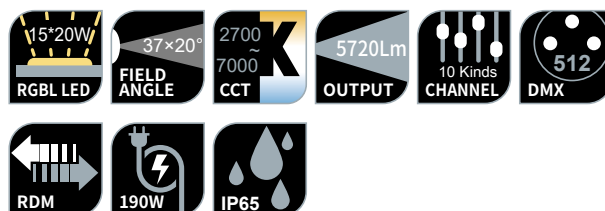

Adopts 15 × 20W RGBL LED  
 Total luminous flux 5,720 lumens  
 Beam angle: 26° × 10°  
 Field angle: 37° × 20°  
 Uniform RGBL color mixing system and rainbow effect  
 Create unlimited movement, infinite color changes

#### OPTIC

- Source: 15 × 20W RGBL LED
- Output: 5720 Lm
- Beam angle: 26° × 10°
- Field angle: 37° × 20°
- CCT: 2700 ~ 7000 K
- CRI: 80
- Source lifetime: >20000 H

#### EFFECT

- Strobe: 1 ~ 25 Hz

#### CONTROL & PROGRAM

- Channel: 4 / 7 / 8 / 11 / 14 / 60 / 63 / 67 / 70 / 120 CH
- Protocol: DMX512, RDM
- Data connection: 3PIN XLR
- Display: LCD display

#### SOFTWARE

- Via DMX signal to update
- Intelligent temperature protection to ensure LED service life

#### HOUSING

- Aluminum alloy structure
- Natural heat dissipation

#### POWER CONSUMPTION

- Voltage: AC 100V~240V 50/60Hz
- Rated power: 190 W

#### OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

#### SIZE & WEIGHT

- Size: 914 × 152 × 166 mm
- N.W: 9.1 kgs



#### PHOTOMETRIC DATA

