




LIGHT IT LIKE IT



Ts6

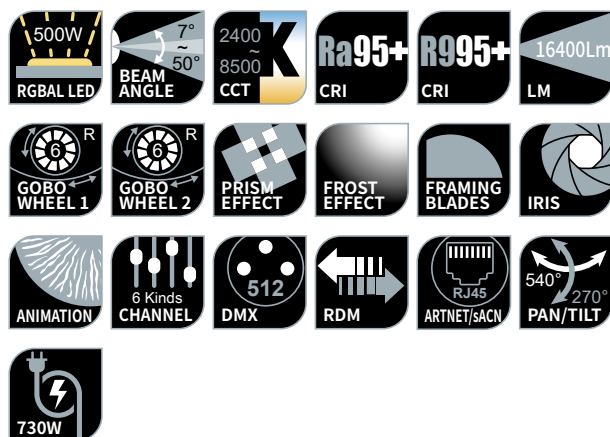

Adopts 500W RGBAL LED
 Total luminous flux 16,400 lumens
 Beam Angle 7° ~50° zoom
 CCT 2400~8500K
 Ra: 95 / R9: 95

OPTIC

- Source: 500W RGBAL LED
- Output: 16400 Lm
- Beam angle: 7 ~ 50°
- CCT: 2400~8500K
- CRI: Ra-95 / R9-95
- Lens diameter: 139 mm
- Source lifetime: >20000 H

EFFECT

- Strobe: 1~25Hz
- LED refresh rate: 1200Hz ~ 25KHz
- Rotation gobo: Wheel 1 (6 + 1) / Wheel 2 (6 + 1)
- Gobo size: Outer diameter 30mm/Inner diameter 25mm/Thickness 1.1mm
- Prism: 4 fact prism + 4 linear
- Frost: Light frost + Heavy frost
- Animation + With iris
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each brade can realize complete beam closing. The whole cutting module can be rotated by $\pm 60^\circ$
- Rich color mixing effect, CT linear adjustable
- Can be set with no PAN&TILT reset function to better cope with narrow installation space and precise positioning

CONTROL & PROGRAM

- Channel: 41CH/57CH/RGB 39CH/RGB 53CH/CMY 39CH/CMY 53CH
- Protocol: DMX512, RDM, ArtNet/sACN
- Data connector: 3PIN XLR, RJ45 In/Out
- Display: 2.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on

SOFTWARE

- Via USB & DMX signal to update
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Aluminum structure radiator (Noise ≤ 35 dB)

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 730 W
- Power factor: 0.99

OTHER

- IP rating: IP30
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 462 × 306 × 783 mm
- N.W: 36.6 kgs

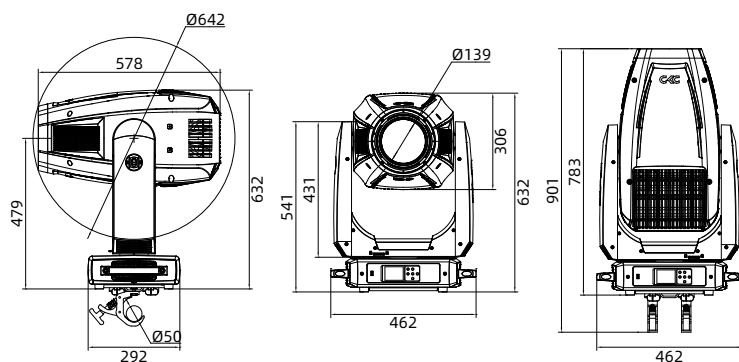

PHOTOMETRIC DATA

Distance(m)	0	5	8	10	12
7~50° Ra: 95 R9: 95					
Lux 7° Diameter(m)		31800 0.61	11900 0.98	7780 1.22	5430 1.47
Lux 50° Diameter(m)		1260 4.66	492 7.46	315 9.33	

ROTATION GOBO



FRAMING BLADES



ANIMATION



PRISM



FROST

