

LIGHT IT
LIKE IT



Soft Panel 300DW



Adopts WW+CW LED

Output: 18200 Lm

Field angle 113°

CCT 3000 ~ 5700K

TV station studio, professional stage, interview with reporters, shooting film and television lights, conference halls, etc.

OPTIC

- Source: WW+CW LED
- Output: 18200 Lm
- Beam angle: 61°
- Field angle: 113°
- CCT: 3000K ~ 5700K
- CRI: 98
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25 Hz
- Dimmer Curve: 4 kinds

CONTROL & PROGRAM

- Channel: 1CH/2CH/8CH/9CH
- Protocol: DMX512, RDM
- Data connector: 3 PIN XLR (Optional: 5 PIN XLR)
- Display: OLED display

SOFTWARE

- Via DMX signal to update
- Silent fan, intelligent speed regulation
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminium alloy light housing
- Fan cooling (Intelligent speed regulation)

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 265 W

OTHER


- IP rating: IP30
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 530 × 141 × 415 mm
- N.W: 13 kgs

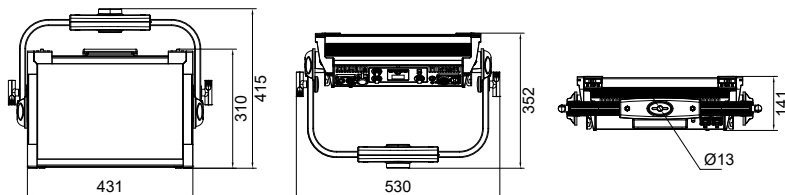

PHOTOMETRIC DATA

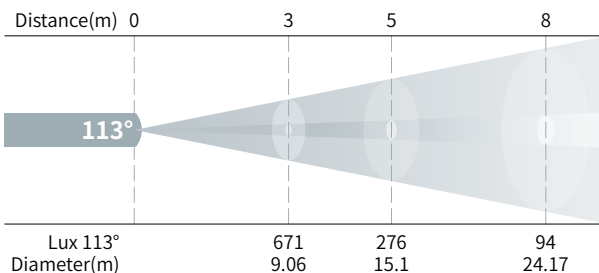

ACCESSORIES

