


CKC

LIGHT LIVE IT



Tourist M3

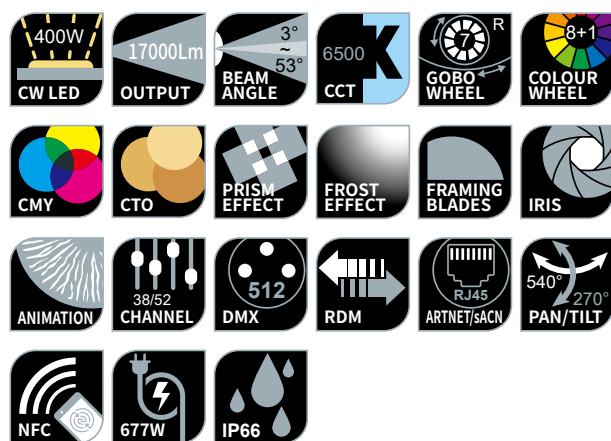

Adopts 400W CW LED light source
 Total luminous flux 17,000 lumens
 Beam Angle 3° ~53° zoom
 CCT 6500K
 CRI 90 (Measured with switched CIE color test samples)
 IP66 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

OPTIC

- Source: 400W CW LED
- Output: 17,000 Lm
- Beam angle: 3 ~ 53°
- CCT: 6500K
- CRI: 72 (With CRI filter)
- Lens diameter: 140 mm
- Source lifetime: >20000 H

EFFECT

- Strobe: 1~25Hz
- LED refresh rate: 900Hz~25KHz
- Rotation gobo Wheel: 7 + 1
- Gobo size: Outer diameter 16.5mm/Inner diameter 12mm/Thickness 1.1mm
- Color wheel: 8 + 1
- CMY + CTO
- Prism: 6 fact prism + 6 linear
- Frost: Light frost + Heavy frost
- Animation + With iris
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each brade can realize complete beam closing. The whole cutting module can be rotated by $\pm 60^\circ$

CONTROL & PROGRAM

- Channel: 38/52 CH
- Protocol: DMX512, RDM, ArtNet/sACN
- Data connector: 3PIN XLR, RJ45 In/Out
- Display: 1.8 inches screen
- NFC: The lighting fixtures do not require power on and can be directly set up, diagnosed, and perform other functions through the CKC app

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 677 W

OTHER

- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 395 × 255 × 634 mm
- N.W: 24.1 kgs

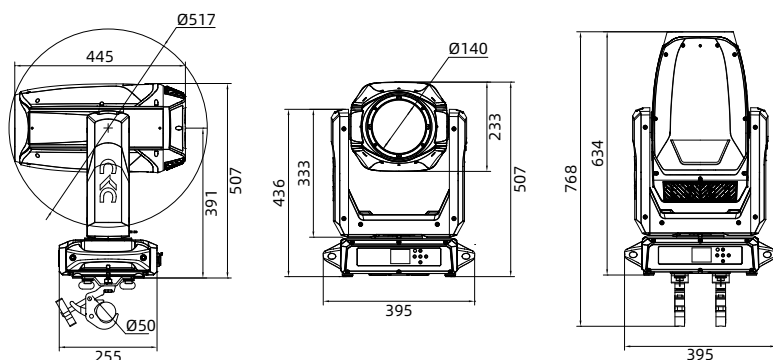

PHOTOMETRICAL DATA

Distance(m)	0	8	15	30	50
Lux 3°		43000	12200	3058	1101
Diameter(m)		0.42	0.79	1.57	2.62
Lux 53°		598	282	43	
Diameter(m)		7.98	14.96	29.91	

ROTATION GOBO



COLOUR



FRAMING BLADES



ANIMATION



PRISM



FROST

